


CEILING CONCEALED DUCT

LOW STATIC PRESSURE
- CL09F / CL12F / CL18F / CL24F

UUA1 ULO

UUB1 U20

UUC1 U40



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
: www.eurovent-certification.com


					Only 460mm deep			
COMBINATION					9	12	18	24
Capacity	Cooling	Min. / Rated / Max.	kW		1.5 / 2.5 / 3.2	1.5 / 3.4 / 4.7	2.0 / 5.0 / 5.8	2.7 / 6.8 / 7.8
	Heating	Min. / Rated / Max.	kW		1.8 / 3.2 / 4.0	1.8 / 4.0 / 4.9	2.3 / 5.8 / 6.7	3.0 / 7.5 / 9.0
Power Input (Set)	Cooling	Min. / Rated / Max.	kW		0.30 / 0.67 / 0.93	0.33 / 1.05 / 1.84	0.3 / 1.35 / 1.89	0.4 / 2.03 / 2.84
	Heating	Min. / Rated / Max.	kW		0.38 / 0.75 / 1.63	0.33 / 1.08 / 1.63	0.4 / 1.77 / 2.48	0.4 / 2.13 / 3.30
Running Current	Cooling	Rated	A		3.0	4.7	7.5	9.0
	Heating	Rated	A		3.3	4.8	8.3	9.4
EER / COP			kWh / kWh		3.80 / 4.30	3.23 / 3.71	3.71 / 3.28	3.35 / 3.52
SEER / SCOP			kWh / kWh		6.1 / 4.0	5.6 / 3.8	6.1 / 3.9	6.2 / 3.9
Pdesign	Cooling @ 35°C		kW		2.5	3.4	5	6.8
	Heating @ -10°C		kW		2.9	2.9	4.1	5.4
Seasonal Energy Label	Cooling / Heating		-		A+ / A+	A+ / A	A++ / A	A++ / A
Annual Energy Consumption	Cooling / Heating		kWh		143 / 1,015	213 / 1,068	287 / 1,472	384 / 1,938
Dehumidification Rate			l/h		0.2	0.8	1.6	2.5
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)		49 / 52	49 / 52	47 / 52	48 / 52
ODU Sound Power Level	Cooling	Rated	dB(A)		65	65	63	65
Piping Connections	Liquid		mm (inch)		Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas		mm (inch)		Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Connections Method		-		Flared	Flared	Flared	Flared
Operation (Outdoor)	Range Cooling	Min. / Max.	°C		-15 / 50	-15 / 50	-15 / 50	-20 / 50
	Heating	Min. / Max.	°C		-20 / 18	-20 / 18	-20 / 18	-20 / 18
INDOOR					CL09F N50	CL12F N50	CL18F N60	CL24F N30
Power Supply			Ø / V / Hz		1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Input (IDU)		H / M / L	W		21 / 15 / 13	21 / 15 / 13	100 / 90 / 80	150 / 130 / 110
Air Flow Rate		H / M / L	m³/min		11.5 / 9.5 / 8	11.5 / 9.5 / 8	15 / 12 / 10	20 / 16 / 12
Dimensions	Body	W x H x D	mm		900 x 190 x 460	900 x 190 x 460	1,100 x 190 x 460	1,100 x 190 x 700
Weight	Body		kg		18.0	18.0	20.9	26.0
Sound Pressure Level	Cooling	H / M / L	dB(A)		35 / 30 / 27	35 / 30 / 27	34 / 31 / 29	39 / 35 / 32
Sound Power Level	Cooling	Max.	dB(A)		55	55	56	58
Piping Connections	Drain	O.D. / I.D.	mm		Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0
List Price - Indoor Unit			£		£385.00	£410.00	£446.00	£521.00
OUTDOOR					UUA1 ULO	UUB1 U20	UUC1 U40	
Power Supply			Ø / V / Hz		1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	
Circuit Breaker		Min.	A		15	20	25	
Power Supply Cable (Included Earth)			No x mm³		3C x 1.5	3C x 2.5	3C x 2.5	
Dimensions	Net	W x H x D	mm		770 x 545 x 288	870 x 650 x 330	950 x 834 x 330	
Weight	Net		kg		33.3	44.5	57.7	
Compressor	Type		-		Twin Rotary	Twin Rotary	Twin Rotary	
	Type		-		R32	R32	R32	
Refrigerant	GWP (Global Warming Potential)		-		675	675	675	
	Precharged Amount		kg		1.0	1.2	1.9	
	t-CO ₂ eq		-		0.675	0.81	1.283	
	Additional Charge (After 7.5m)		g/m		20	20	40	
Fan	Air Flow Rate	Rated	m³/min x No.		28 x 1	50 x 1	58 x 1	
Total Piping Length		Min. / Max.	m		5 / 30	5 / 30	5 / 50	
Piping Elevation	IDU - ODU	Max.	m		30	30	30	
List Price - Outdoor Unit			£		£816.00	£816.00	£1,046.00	£1,355.00
List Price - Indoor + Outdoor Unit Price			£		£1,201.00	£1,226.00	£1,492.00	£1,876.00

COMPACT CEILING CONCEALED DUCT

LOW STATIC PRESSURE
- CL18F / CL24F

UUA1 ULO

UUB1 U20



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
: www.eurovent-certification.com





COMBINATION					18	24
Capacity	Cooling	Min. / Rated / Max.	kW	1.8 / 4.7 / 5.1	2.7 / 6.8 / 7.5	
	Heating	Min. / Rated / Max.	kW	2.1 / 5.2 / 5.7	3.0 / 7.5 / 8.6	
Power Input (Set)	Cooling	Min. / Rated / Max.	kW	0.34 / 1.62 / 1.99	0.40 / 2.12 / 2.54	
	Heating	Min. / Rated / Max.	kW	0.30 / 1.53 / 1.99	0.50 / 2.41 / 3.13	
Running Current	Cooling	Rated	A	7.2	9.3	
	Heating	Rated	A	6.8	10.5	
EER / COP			kWh / kWh	2.90 / 3.40	3.21 / 3.11	
SEER / SCOP			kWh / kWh	5.1 / 3.8	6.0 / 4.1	
Pdesign	Cooling @ 35°C		kW	4.7	6.8	
	Heating @ -10°C		kW	2.7	4.2	
Seasonal Energy Label	Cooling / Heating		-	A / A	A+ / A+	
Annual Energy Consumption	Cooling / Heating		kWh	323 / 995	397 / 1,434	
Dehumidification Rate			l/h	1.5	2.4	
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	49 / 52	48 / 53	
ODU Sound Power Level	Cooling	Rated	dB(A)	65	65	
Piping Connections	Liquid		mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	
	Gas		mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	
	Connections Method		-	Flared	Flared	
Operation (Outdoor) Range	Cooling	Min. / Max.	°C	-10 / 50	-10 / 48	
	Heating	Min. / Max.	°C	-10 / 18	-15 / 18	
INDOOR					CL18F N60	CL24F N30
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	
Power Input (IDU)		H / M / L	W	100 / 90 / 80	150 / 130 / 110	
Air Flow Rate		H / M / L	m³/min	15 / 12 / 10	20 / 16 / 12	
Dimensions	Body	W x H x D	mm	1,100 x 190 x 460	1,100 x 190 x 700	
Weight	Body		kg	20.9	26	
Sound Pressure Level	Cooling	H / M / L	dB(A)	34 / 31 / 29	39 / 35 / 32	
Sound Power Level	Cooling	Max.	dB(A)	56	58	
Piping Connections	Drain	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	
List Price - Indoor Unit			£	£446.00	£521.00	
OUTDOOR					UUA1 ULO	UUB1 U20
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	
Circuit Breaker		Min.	A	15	20	
Power Supply Cable (Included Earth)			No x mm³	3C x 1.5	3C x 2.5	
Dimensions	Net	W x H x D	mm	770 x 545 x 288	870 x 650 x 330	
Weight	Net		kg	33.3	44.5	
Compressor	Type		-	Twin Rotary	Twin Rotary	
	Type		-	R32	R32	
Refrigerant	GWP (Global Warming Potential)		-	675	675	
	Precharged Amount		kg	1.0	1.2	
	t-CO ₂ eq		-	0.675	0.81	
	Additional Charge (After 7.5m)		g/m	20	40	
Fan	Air Flow Rate	Rated	m³/min x No.	28 x 1	50 x 1	
Total Piping Length		Min. / Max.	m	5 / 30	5 / 35	
Piping Elevation	IDU - ODU	Max	m	30	30	
List Price - Outdoor Unit			£	£816.00	£1,046.00	
List Price - Indoor + Outdoor Unit Price			£	£1,262.00	£1,567.00	

CEILING CONCEALED DUCT

MID STATIC PRESSURE
- CM18F / CM24F / UM30F

ADD THE PRICE OF THE CONTROLLER TO YOUR ORDER

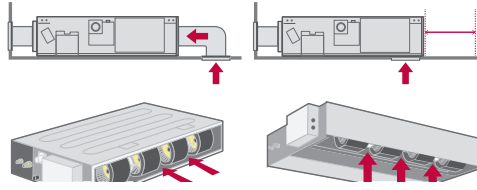

UUB1 U20

UUC1 U40



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
: www.eurovent-certification.com


COMBINATION					18	24	30
Capacity	Cooling	Min. / Rated / Max.	kW	2.0 / 5.0 / 5.8	2.7 / 6.8 / 8.0	3.1 / 7.8 / 9.0	
	Heating	Min. / Rated / Max.	kW	2.3 / 5.8 / 6.7	3.0 / 7.5 / 9.0	3.6 / 9.0 / 10.1	
Power Input (Set)	Cooling	Min. / Rated / Max.	kW	0.30 / 1.33 / 1.86	0.40 / 1.95 / 2.69	0.40 / 2.23 / 3.03	
	Heating	Min. / Rated / Max.	kW	0.40 / 1.76 / 2.46	0.50 / 2.27 / 3.29	0.50 / 2.64 / 3.33	
Running Current	Cooling	Rated	A	7.4	8.7	9.9	
	Heating	Rated	A	8.3	10.1	11.7	
EER / COP			kWh / kWh	3.75 / 3.30	3.49 / 3.31	3.50 / 3.41	
SEER / SCOP			kWh / kWh	6.4 / 4.1	6.6 / 3.9	6.1 / 4.0	
Pdesign	Cooling @ 35°C		kW	5	6.8	7.8	
	Heating @ -10°C		kW	4.1	5.4	5.4	
Seasonal Energy Label	Cooling / Heating		-	A++ / A+	A++ / A	A++ / A+	
Annual Energy Consumption	Cooling / Heating		kWh	273 / 1,400	361 / 1,938	448 / 1,890	
Dehumidification Rate			l/h	1.2	2.6	2.4	
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	47 / 52	48 / 52	50 / 52	
ODU Sound Power Level	Cooling	Rated	dB(A)	63	65	68	
Piping Connections	Liquid		mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)	
	Gas		mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)	
	Connections Method		-	Flared	Flared	Flared	
Operation (Outdoor)	Range Cooling	Min. / Max.	°C	-15 / 50	-20 / 50	-20 / 50	
	Heating	Min. / Max.	°C	-20 / 18	-20 / 18	-20 / 18	
INDOOR					CM18F N10	CM24F N10	UM30F N10
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	
Power Input (IDU)		H / M / L	W	150 / 130 / 110	180 / 150 / 130	220 / 200 / 180	
Air Flow Rate		H / M / L	m³/min	16.5 / 14.5 / 13	18 / 16.5 / 14.5	22 / 20 / 18	
Dimensions	Body	W x H x D	mm	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700	
Weight	Body		kg	24.6	24.6	26.2	
Sound Pressure Level	Cooling	H / M / L	dB(A)	34 / 32 / 30	35 / 34 / 32	37 / 35 / 34	
Sound Power Level	Cooling	Max.	dB(A)	59	60	62	
Piping Connections	Drain (Natural Drainage)	O.D. / I.D.	mm	Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4	
	Drain (Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0	
List Price - Indoor Unit			£	£565.00	£635.00	£709.00	
OUTDOOR					UUB1 U20	UUC1 U40	
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	
Circuit Breaker		Min.	A	20		25	
Power Supply Cable (Included Earth)			No x mm³	3C x 2.5		3C x 2.5	
Dimensions	Net	W x H x D	mm	870 x 650 x 330		950 x 834 x 330	
Weight	Net		kg	44.5		57.7	
Compressor	Type		-	Twin Rotary		Twin Rotary	
	Type		-	R32		R32	
Refrigerant	GWP (Global Warming Potential)		-	675		675	
	Precharged Amount		kg	1.2		1.9	
	t-CO ₂ eq		-	0.81		1.283	
	Additional Charge (After 7.5m)		g/m	20		40	
Fan	Air Flow Rate	Rated	m³/min x No.	50 x 1		58 x 1	
Total Piping Length		Min. / Max.	m	5 / 30		5 / 50	
Piping Elevation	IDU - ODU	Max.	m	30		30	
List Price - Outdoor Unit			£	£1,046.00	£1,355.00	£1,355.00	
List Price - Indoor + Outdoor Unit Price			£	£1,611.00	£1,990.00	£2,064.00	

CEILING CONCEALED DUCT

MID STATIC PRESSURE

- UM36F / UM42F / UM48F / UM60F

UUD1.U30 UUD3.U30



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
: www.eurovent-certification.com



COMBINATION					36	42	48	60
Capacity	Cooling	Min. / Rated / Max.	kW	3.8 / 9.5 / 12.5	4.8 / 12.0 / 14.0	5.4 / 13.4 / 15.7	5.8 / 14.6 / 15.8	
	Heating	Min. / Rated / Max.	kW	4.3 / 10.8 / 13.4	5.4 / 13.5 / 15.8	6.2 / 15.5 / 17.5	6.7 / 16.8 / 18.1	
Power Input (Set)	Cooling	Min. / Rated / Max.	kW	0.50 / 2.50 / 3.80	0.70 / 3.48 / 4.52	0.90 / 4.32 / 5.62	1.00 / 4.95 / 5.54	
	Heating	Min. / Rated / Max.	kW	0.60 / 2.77 / 3.77	0.80 / 3.74 / 4.86	0.90 / 4.31 / 5.26	0.90 / 4.60 / 5.29	
Running Current	Cooling	Rated	A	11.1	15.3	19.0	21.6	
	Heating	Rated	A	12.6	16.4	18.4	20.4	
EER / COP			kWh / kWh	3.80 / 3.90	3.45 / 3.61	3.10 / 3.60	2.95 / 3.65	
SEER / SCOP			kWh / kWh	5.80 / 3.90	5.60 / 3.90	5.80 / 4.00	5.60 / 4.00	
Pdesign	Cooling @ 35°C		kW	9.5	12.0	13.4	14.6	
	Heating @ -10°C		kW	9.5	9.5	9.5	9.5	
Seasonal Energy Label	Cooling / Heating		-	A+ / A	A+ / A	- / -	- / -	
Annual Energy Consumption	Cooling / Heating		kWh	573 / 3,410	750 / 3,410	1,386 / 3,325	1,564 / 3,325	
Dehumidification Rate			l/h	2.9	4.4	4.8	4.7	
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)	50 / 50	51 / 52	52 / 53	54 / 54	
ODU Sound Power Level	Cooling	Rated	dB(A)	66	69	69	71	
Piping Connections	Liquid		mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	
	Gas		mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	
	Connections Method		-	Flared	Flared	Flared	Flared	
Operation (Outdoor)	Range	Cooling	Min. / Max.	°C	-20 / 52	-20 / 52	-20 / 52	-20 / 52
		Heating	Min. / Max.	°C	-25 / 18	-25 / 18	-25 / 18	-25 / 18
INDOOR					UM36F N20	UM42F N20	UM48F N30	UM60F N30
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	
Power Input (IDU)		H / M / L	W	183 / 134 / 101	266 / 200 / 145	242 / 159 / 124	342 / 287 / 242	
Air Flow Rate		H / M / L	m³/min	32 / 28 / 24	38 / 33 / 28	40 / 34 / 28	50 / 45 / 40	
Dimensions	Body	W x H x D	mm	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 360 x 700	1,250 x 360 x 700	
Weight	Body		kg	38.5	38.5	43.5	43.5	
Sound Pressure Level	Cooling	H / M / L	dB(A)	36 / 34 / 33	38 / 36 / 34	39 / 38 / 36	42 / 40 / 39	
Sound Power Level	Cooling	Max.	dB(A)	60	62	65	66	
Piping Connections	Drain (Natural Drainage)	O.D. / I.D.	mm	Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4	
	Drain (Using Drain Pump)	O.D. / I.D.	mm	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0	
List Price - Indoor Unit			£	£759.00	£778.00	£938.00	£1,164.00	
OUTDOOR - SINGLE PHASE					UUD1.U30			
Power Supply			Ø / V / Hz	1 / 220-240 / 50				
Circuit Breaker		Min.	A	40				
Power Supply Cable (Included Earth)			No x mm³	3C x 6.0				
List Price - Outdoor Unit			£	£1,967.00				
OUTDOOR - THREE PHASE					UUD3.U30			
Power Supply			Ø / V / Hz	3 / 380-415 / 50				
Circuit Breaker		Min.	A	20				
Power Supply Cable (Included Earth)			No x mm³	5C x 2.5				
List Price - Outdoor Unit			£	£2,247.00				
Dimensions	Net	W x H x D	mm	950 x 1,380 x 330				
Weight	Net		kg	85.0				
Compressor	Type		-	Inverter Scroll				
Refrigerant	Type		-	R32				
	GWP (Global Warming Potential)		-	675				
	Precharged Amount		kg	3.0				
	t-CO ₂ eq		-	2.025				
	Additional Charge (After 7.5m)		g/m	40				
Fan	Air Flow Rate	Rated	m³/min x No.	55 x 2				
Total Piping Length		Min. / Max.	m	5 / 85				
Piping Elevation	IDU - ODU	Max.	m	30				
List Price - Single Phase Outdoor + Indoor Unit Price			£	£2,726.00	£2,745.00	£2,905.00	£3,131.00	
List Price - Three Phase Outdoor + Indoor Unit Price			£	£3,006.00	£3,025.00	£3,185.00	£3,411.00	

COMPACT CEILING CONCEALED DUCT


MID STATIC PRESSURE

- CM18F / CM24F / UM30F / UM36F

UUA1 ULO

UUB1 U20

UUC1 U40



LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
: www.eurovent-certification.com



COMBINATION					18	24	30	36
Capacity	Cooling	Min. / Rated / Max.	kW		1.8/5.0/5.6	2.7/6.8/7.5	3.0/7.5/8.3	3.8/9.5/10.5
	Heating	Min. / Rated / Max.	kW		2.2/5.5/6.7	3.0/7.4/8.5	3.2/8.0/8.8	4.3/10.8/11.5
Power Input (Set)	Cooling	Min. / Rated / Max.	kW		0.35/1.67/1.92	0.50/2.34/2.81	0.50/2.57/3.08	0.60/3.16/3.86
	Heating	Min. / Rated / Max.	kW		0.32/1.58/1.77	0.40/2.17/2.82	0.50/2.25/2.93	0.60/3.03/3.48
Running Current	Cooling	Rated	A		7.4	10.3	11.0	14.0
	Heating	Rated	A		7.0	9.7	9.7	13.4
EER / COP			kWh / kWh		3.00/3.50	2.91/3.41	2.92/3.56	3.01/3.57
SEER / SCOP			kWh / kWh		6.1/3.8	5.8/4.1	5.6/3.9	5.9/4.0
Pdesign	Cooling @ 35°C		kW		5	6.8	7.5	9.5
	Heating @ -10°C		kW		2.8	4.1	4.3	5.5
Seasonal Energy Label	Cooling / Heating		-		A++ / A	A+ / A+	A+ / A	A+ / A+
Annual Energy Consumption	Cooling / Heating		kWh		287/1,032	410/1,400	469/1,544	564/1,924
Dehumidification Rate			l/h		1.2	2.5	2.6	3.2
ODU Sound Pressure Level	Cooling / Heating	Rated	dB(A)		49/52	48/53	50/54	54/56
ODU Sound Power Level	Cooling	Rated	dB(A)		65	65	67	70
Piping Connections	Liquid		mm (inch)		Ø6.35 (1/4)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas		mm (inch)		Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Connections Method		-		Flared	Flared	Flared	Flared
Operation (Outdoor)	Range Cooling	Min. / Max.	°C		-10 / 50	-10/48	-10/48	-20/50
	Heating	Min. / Max.	°C		-10 / 18	-15 / 18	-15 / 18	-15 / 18
INDOOR					CM18F N10	CM24F N10	UM30F N10	UM36F N20
Power Supply			Ø / V / Hz		1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Input (IDU)		H / M / L	W		150 / 130 / 110	180 / 150 / 130	220 / 200 / 180	183 / 134 / 101
Air Flow Rate		H / M / L	m³/min		16.5 / 14.5 / 13	18 / 16.5 / 14.5	22 / 20 / 18	32 / 28 / 24
Dimensions	Body	W x H x D	mm		900 x 270 x 700	900 x 270 x 700	900 x 270 x 700	1,250 x 270 x 700
Weight	Body		kg		24.6	24.6	26.2	38.5
Sound Pressure Level	Cooling	H / M / L	dB(A)		34 / 32 / 30	35 / 34 / 32	37 / 35 / 34	36 / 34 / 33
Sound Power Level	Cooling	Max.	dB(A)		59	60	62	60
Piping Connections	Drain (Natural Drainage)	O.D. / I.D.	mm		Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4	Ø25.4 / 19.4
	Drain (Using Drain Pump)	O.D. / I.D.	mm		Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0	Ø32.0 / 26.0
List Price - Indoor Unit			£		£565.00	£635.00	£709.00	£759.00
OUTDOOR					UUA1 ULO	UUB1 U20	UUC1 U40	
Power Supply			Ø / V / Hz		1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50	
Circuit Breaker		Min.	A		15	20	25	
Power Supply Cable (Included Earth)			No x mm³		3C x 1.5	3C x 2.5	3C x 2.5	
Dimensions	Net	W x H x D	mm		770 x 545 x 288	870 x 650 x 330	950 x 834 x 330	
Weight	Net		kg		33.3	44.5	57.7	
Compressor	Type		-		Twin Rotary	Twin Rotary	Twin Rotary	
	Type		-		R32	R32	R32	
Refrigerant	GWP (Global Warming Potential)		-		675	675	675	
	Precharged Amount		kg		1	1.2	1.9	
	t-CO ₂ eq		-		0.675	0.81	1.283	
	Additional Charge (After 7.5m)		g/m		20	40	40	
Fan	Air Flow Rate	Rated	m³/min x No.		28 x 1	50 x 1	58 x 1	
Total Piping Length		Min. / Max.	m		5 / 30	5 / 35	5 / 50	
Piping Elevation	IDU - ODU	Max.	m		30	30	30	
List Price - Outdoor Unit			£		£816.00	£1,046.00	£1,046.00	£1,355.00
List Price - Indoor + Outdoor Unit Price			£		£1,381.00	£1,681.00	£1,755.00	£2,114.00