



Cartridge Heaters

Low to Medium Watt Density

U.L. Recognized – E56973
C.S.A. Certified 016386-0-000

CARTRIDGE



Applications:


Compressor Crankcase Heating, Copiers, Dies, Food Processing, Glue Pots, Heat Sealing, Hot Melt Adhesive, Labeling, Medical Equipment, Packaging, Photographic Processing, Plastic Molding, Platens, Wax Pots.

Features:

- Hotwatt Precision Cartridge Heaters provided localized heat to restricted work areas requiring close thermal control. Dies, platens, and a variety of other types of processing equipment are efficiently heated. Closely controlled work temperatures up to 1250°F are obtained by a combination of heater location and proper wattage output.
- Basic designs are readily adaptable to a wide variety of special requirements, sizes, or ratings.
- Maximum surface temperatures up to 1250° F (677°C).
- Designations are etched on the sheath to preserve accurate shape.
- Heating elements arranged just beneath outside surface for maximum heat transfer, minimum core temperature and faster heating.
- Made in U.S.A.
- Where specified, units can be supplied liquid tight.
- Long, trouble free service.

Construction:

- 1 Heliarc welded end seal.
- 2 Mica.
- 3 Series 300 stainless steel sheath of precision dimensions and tolerances for intimate, stable, non-oxidizing contact with cavities machined for them.
- 4 Element wire situated in close proximity to outside surface for maximum heat transfer and minimum internal temperature while preserving good dielectric qualities.
- 5 Magnesium oxide packing.
- 6 Ceramic element support.
- 7 Ceramic cap.
- 8 Teflon insulated leads: ¼" diameter
Fiberglass leads: ⅜" – ¾" diameter
Post terminals: ⅛" – 2⅜"

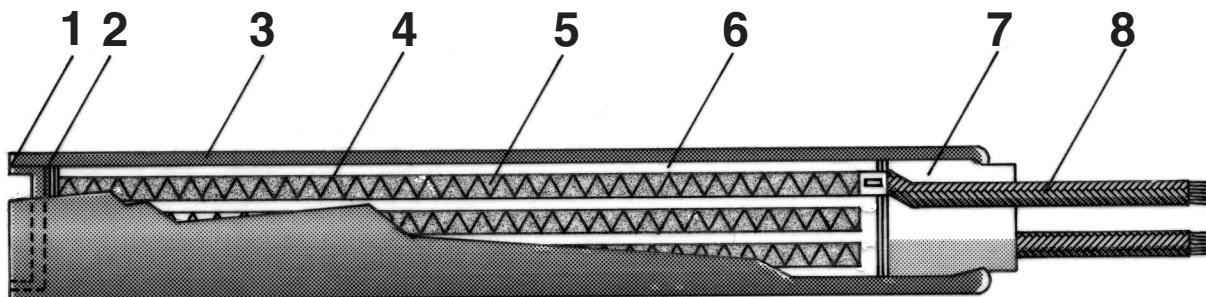



Cartridge Heaters

Low to Medium Watt Density

Diameter: $\frac{3}{8}$ "

Length	Cat.No.	Watts	Volts	Watt Density w/in. ²	Approx. Wght. (lbs.)
1"	SC37-1	30	120	40	.04
1½"	SC37-1.5	10	120	5	.07
1½"	SC37-1.5	30	120	20	.07
1½"	SC37-1.5	50	120	40	.07
2"	SC37-2	15	120	9	.09
2"	SC37-2	70	120	35	.09
2"	SC37-2	100	120	50	.09
2½"	SC37-2.5	25	120	10	.12
2½"	SC37-2.5	100	120	40	.12
3"	SC37-3	20	120	6	.15
3"	SC37-3	75	120	25	.15
3½"	SC37-3.5	40	120	12	.18
3½"	SC37-3.5	150	120	50	.18
4"	SC37-4	20	120	5	.20
4"	SC37-4	55	120	12	.20
4"	SC37-4	220	120	50	.20
4½"	SC37-4.5	60	120	12	.23
4½"	SC37-4.5	250	120	50	.23
5"	SC37-5	70	120	12	.27
5"	SC37-5	280	120	50	.27
5½"	SC37-5.5	25	120	4	.31
6"	SC37-6	90	120	12	.36
6"	SC37-6	350	120	50	.36
8"	SC37-8	125	120	14	.16
8"	SC37-8	500	120	58	.16
9"	SC37-9	140	120	14	.18
9"	SC37-9	550	120	55	.18
10"	SC37-10	100	120	9	.20
10"	SC37-10	400	120	36	.20
12"	SC37-12	150	120	11	.22
12"	SC37-12	600	120	45	.22