


NT2192GK

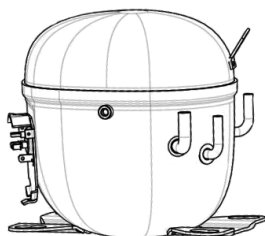

**ENGINEERING CODE**  
923EA04

**REFRIGERANT**  
R-404A

**POWER SUPPLY**  
220-240 V 50 Hz

**APPLICATION**  
LBP

**MOTOR TYPE**  
CSCR

**STANDARD**  
CECOMAF

**COOLING CAPACITY**  
728 W

**EFFICIENCY**  
1.04 W/W



DATA

GENERAL DATA

Model	NT2192GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	LBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1 1/4
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	8.4 Ω at 25°C
Run Winding Resistance	1.9 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	35 A

## MECHANICAL DATA

Displacement	22.37 cm <sup>3</sup>
Oil Charge	450 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	17.5 Kg

## ELECTRICAL COMPONENTS

Start Capacitor	130-156 µf/250 V
CSR CSIR BOX	Yes
Overload Protection	MST26AHK-3261

## EXTERNAL CHARACTERISTICS

Base Plate	UNI
------------	-----

Connector	Internal Diameter	Shape	Material
Suction	9.6 mm	VERTICAL	COPPER
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

## PERFORMANCE

### TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	LBP
Tested Standard	CECOMAF
Tested Cooling	Fan
Tested Voltage	220 V
Tested Frequency	50 Hz
Max Refrigerant Charge	800 g
Refrigerant Temperature	Dew

## RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
55	-25	728	1.04	700	-	22.68

Test Condition: Subcooling 0 K, Return Gas 32 °C. Data are an indication of performance based simulation.

## PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	479	1.14	422	-	11.33
-35	644	1.32	489	-	15.29
-30	854	1.52	562	-	20.34
-25	1109	1.74	637	-	26.52
-20	1409	1.99	710	-	33.86
-15	1753	2.26	776	-	42.39
-10	2140	2.57	833	-	52.14

Test Condition: Subcooling 0 K, Return Gas 32 °C. Data are an indication of performance based simulation.

## PERFORMANCE CURVE

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	389	0.90	434	-	10.33
-35	530	1.04	510	-	14.13
-30	709	1.19	595	-	18.98
-25	926	1.35	684	-	24.90
-20	1180	1.53	773	-	31.92
-15	1471	1.71	860	-	40.08
-10	1799	1.92	939	-	49.40

Test Condition: Subcooling 0 K, Return Gas 32 °C. Data are an indication of performance based simulation.


## PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-30	550	0.92	597	-	17.03
-25	728	1.04	700	-	22.68
-20	936	1.16	805	-	29.38
-15	1175	1.29	910	-	37.16
-10	1443	1.43	1011	-	46.05

Test Condition: Subcooling 0 K, Return Gas 32 °C. Data are an indication of performance based simulation.

## ENVELOPE

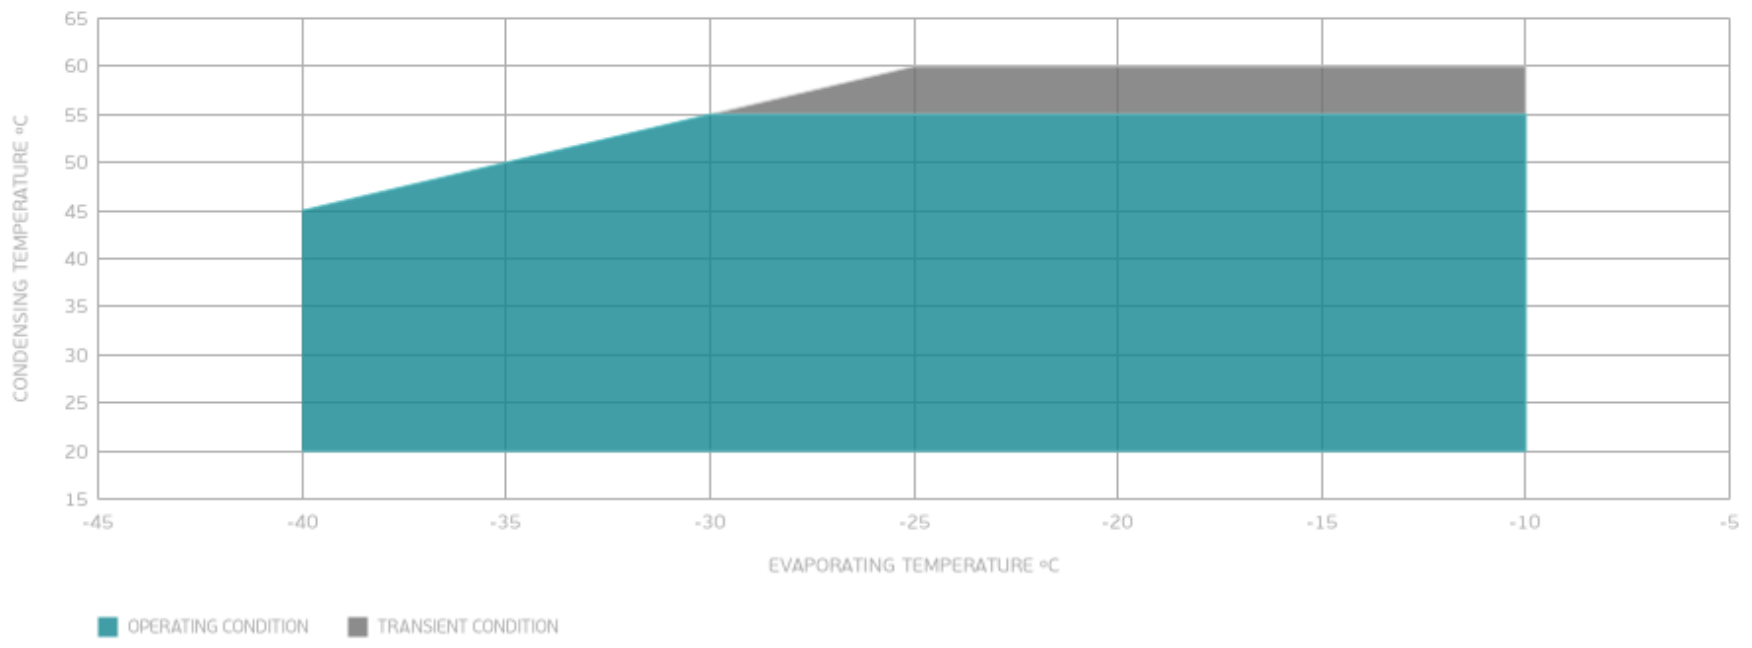

## EXTERNAL DIMENSIONS

