

CP - CP/T - CP/TW - CP/I - CP/IW PVC insulated cables



Characteristics

- Power cable: standard length: 1 m.
- CP : PVC insulated cables.
- CP/T : with tinned copper braid and earthing conductor.
- CP/TW : with tinned copper braid no earthing conductor.
- CP/I : with stainless steel braid and earthing conductor.
- CP/IW : with stainless steel braid no earthing conductor.
- Special production on request.

Applications

CP, CP/T, CP/TW, CP/I and CP/IW heating cables are mainly used in the household electrical and refrigeration industries and for equipment where protection against freezing or temperature maintenance is necessary.

To ensure that these heating elements enjoy a long service life, we recommend using a control device.

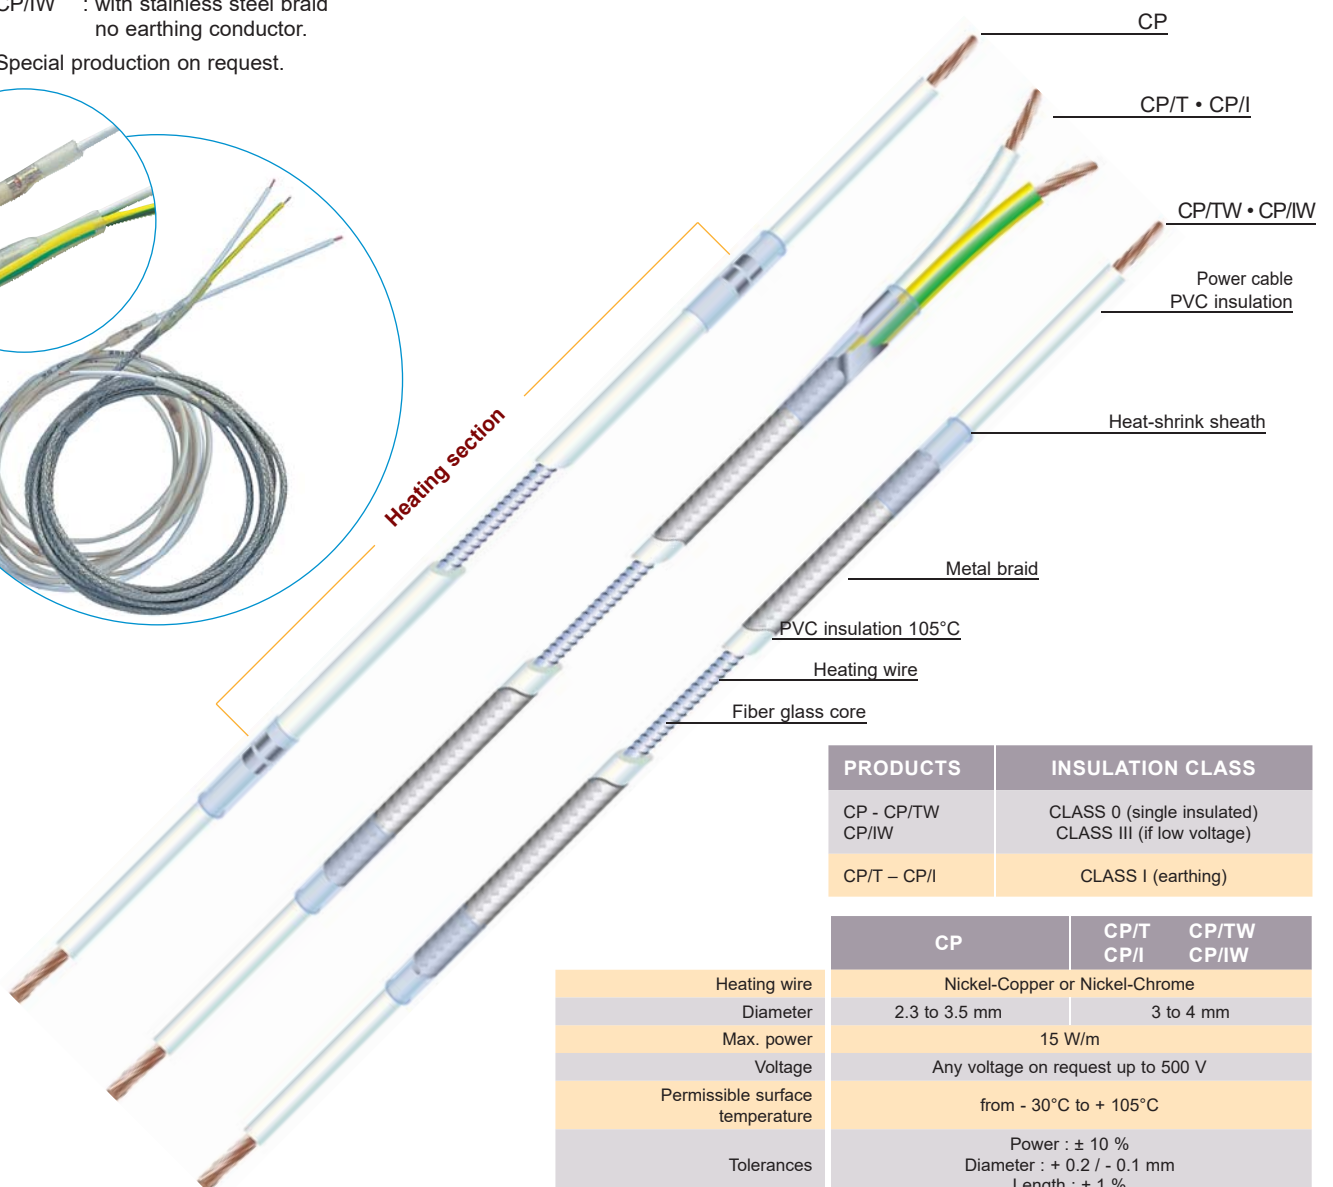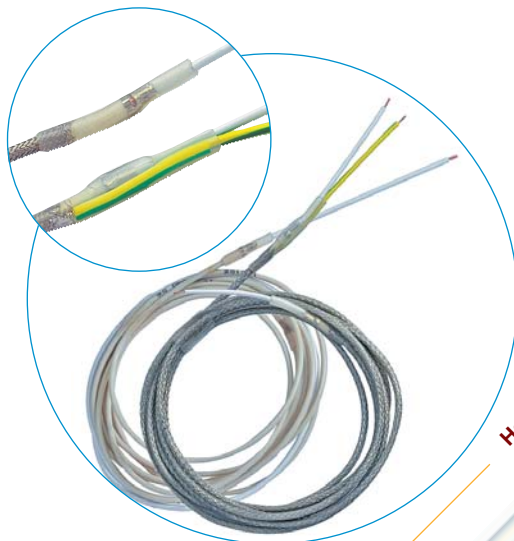

PRODUCTS	INSULATION CLASS
CP - CP/TW CP/IW	CLASS 0 (single insulated) CLASS III (if low voltage)
CP/T - CP/I	CLASS I (earthing)

	CP	CP/T CP/I	CP/TW CP/IW
Heating wire	Nickel-Copper or Nickel-Chrome		
Diameter	2.3 to 3.5 mm	3 to 4 mm	
Max. power	15 W/m		
Voltage	Any voltage on request up to 500 V		
Permissible surface temperature	from - 30°C to + 105°C		
Tolerances	Power : ± 10 % Diameter : + 0.2 / - 0.1 mm Length : ± 1 %		
Connection insulation	Heat-shrink sheath with adhesive		
Ingress protection code	IP 55		
Minimum bending radius	6 x the diameter		

Use

Heating cables are series resistors. Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.



TO TALK TO OUR EXPERT TEAM,
CALL +44 (0)1483 869 070 OR
EMAIL INDUSTRIAL@HAWCO.CO.UK