



JADE SUPERMATCH



AS25 - AS35

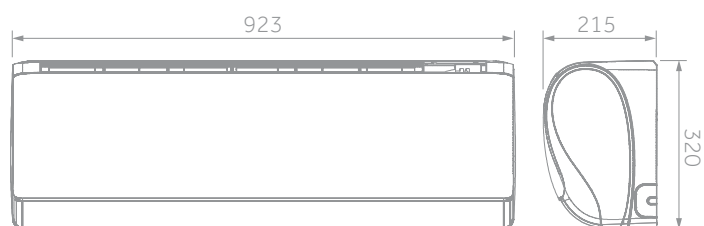

1U25 - 1U35

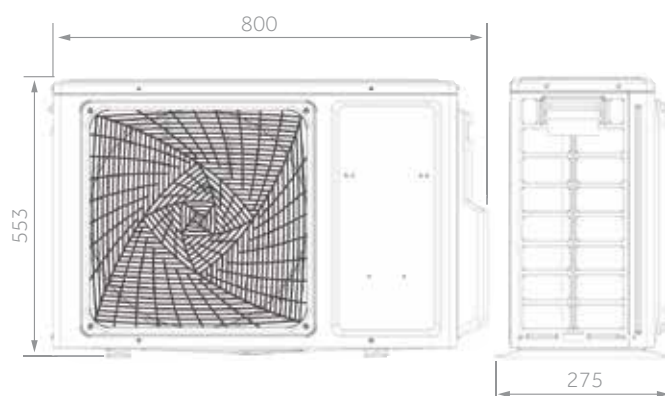

2,5 kW - 3,5 kW

JADE SUPERMATCH WHILE STOCKS LAST

Haier

2,5 kW

3,5 kW

MONOSPLIT




A+++ / A+++



Standard HR-HJ



PM 2.5
Detection



Self Clean



Precise
Dehumidification



Silence



Integrated
Wi-Fi Control



I Feel



3D



Eco Sensor



Puri Clean

- PM 2,5 detection
- Self-Clean
- Precise dehumidification
- Low noise level
- Integrated Wi-Fi control
- Easy installation
- 3D airflow: continuous movement of horizontal and vertical deflectors
- Eco Sensor
- Puri Clean

| INDOOR UNIT | Model | | AS25S2SJ1FA-3 | AS35S2SJ1FA-3 |
|---|---------------|---------------------|-------------------|-------------------|
| OUTDOOR UNIT | Model | | 1U25MECFRA-3 | 1U35MECFRA-3 |
| Performance data | | | | |
| Output power - COOLING | nom (min-max) | kW | 2,60 (1,00-4,00) | 3,50 (1,00-4,00) |
| Output power - HEATING | nom (min-max) | kW | 3,20 (1,10-5,40) | 4,20 (1,30-5,80) |
| Absorbed power - COOLING | nom (min-max) | kW | 0,577 (0,30-1,25) | 0,795 (0,30-1,35) |
| Absorbed power - HEATING | nom (min-max) | kW | 0,666 (0,30-1,85) | 0,893 (0,30-1,85) |
| Energy class | EER | W/W | 4,50 | 4,40 |
| | COP | W/W | 4,80 | 4,70 |
| COOLING Pdesign | 35 °C | kW | 2,60 | 3,50 |
| HEATING Pdesign | (-10 °C) | kW | 2,60 | 2,65 |
| Energy class | SEER | | 8,75 (A+++) | 8,75 (A+++) |
| | SCOP | | 5,10 (A+++) | 5,10 (A+++) |
| Annual Energy Consumption - COOLING | | kWh/a | 104 | 140 |
| Annual Energy Consumption - HEATING | | kWh/a | 714 | 727 |
| Indoor Unit | | | | |
| Power supply | | Ph/V/Hz | 1/220-240/50 | 1/220-240/50 |
| Treated air volume | H | m ³ /h | 550 | 600 |
| Dehumidification | | L/h | 1,2 | 1,6 |
| High sound power - COOLING | | dB | 56 | 57 |
| High sound power - HEATING | | dB | 56 | 57 |
| Sound pressure - COOLING | | dB(A) | 36/32/29/15 | 37/33/30/16 |
| Sound pressure - HEATING | | dB(A) | 36/32/29/15 | 37/33/30/16 |
| Net dimensions | WxDxH | mm | 923x215x320 | 923x215x320 |
| Packaging dimensions | WxDxH | mm | 1032x318x418 | 1032x318x418 |
| Net/gross weight | | kg | 12,0/15,2 | 12,0/15,2 |
| Outdoor Unit | | | | |
| Power supply | | Ph/V/Hz | 1/220-240/50 | 1/220-240/50 |
| Power cable | | N x mm ² | 3 x 1,5 | 3 x 1,5 |
| Interconnection cable | | N x mm ² | 4 x 1,0 | 4 x 1,0 |
| Sound power | H | dB | 61 | 62 |
| Sound pressure | H | dB(A) | 48 | 49 |
| Running current cooling/heating | Max | A | 8,0/8,0 | 8,0/8,0 |
| Starting current cooling/heating | Max | A | 1,5/1,5 | 1,5/1,5 |
| Net dimensions | WxDxH | mm | 800x275x553 | 800x275x553 |
| Packaging dimensions | WxDxH | mm | 902x375x607 | 902x375x607 |
| Net/gross weight | | kg | 29,8/33,6 | 29,8/33,6 |
| Compressor type | | | Rotary Inverter | Rotary Inverter |
| Installation data | | | | |
| Refrigerant | | | R32 | R32 |
| Liquid pipe | ∅ | mm (inch) | 6,35 (1/4) | 6,35 (1/4) |
| Gas pipe | ∅ | mm (inch) | 9,52 (3/8) | 9,52 (3/8) |
| Standard pipe length without refrigerant charge | | m | 7 | 7 |
| Maximum pipe length | | m | 20 | 20 |
| Maximum IU - OU elevation | | m | 10 | 10 |
| Refrigerant charge in the factory | | kg | 0,74 | 0,74 |
| Refrigerant charge in the factory | | TCO ₂ eq | 0,50 | 0,50 |
| Additional ref. charge over std length | | g/m | 20 | 20 |
| Operating limits - COOLING (in/out) | min-max | °C | 21-35°C/-10-43°C | |
| Operating limits - HEATING (in/out) | min-max | °C | 10-27°C/-20-24°C | |

The data in this catalogue is purely indicative as the data may vary. Please be advised to check the accuracy of the data with the supplier before purchasing products.



Standard HQ-HJ



Silence




Integrated Wi-Fi control



Easy Installation



3D



2-Way Piping Design



Self-Hygiene



Puri Clean



I Feel

- Self-Clean (Only Dual)
- Low noise level
- Integrated Wi-Fi control
- Easy installation
- 3D airflow: continuous movement of horizontal and vertical deflectors
- 2-way Piping design
- 56°C Steri-Clean
- Self-Hygiene
- Puri Clean
- I Feel

| Indoor Unit | Model | | AS25S2SJ1FA-3 | AS35S2SJ1FA-3 |
|----------------------------|----------------|---------|------------------|------------------|
| Performance data | | | | |
| Output power - COOLING | nom (min-max) | kW | 2,60 (1,00-4,00) | 3,50 (1,00-4,00) |
| Output power - HEATING | nom (min-max) | kW | 3,20 (1,10-5,40) | 4,20 (1,30-5,80) |
| Power supply | | Ph/V/Hz | 1/220-240/50 | 1/220-240/50 |
| Interconnection cable | | | 4 x 1,0 | 4 x 1,0 |
| Treated air volume | H | m3/h | 550 | 600 |
| Indoor Unit | | | | |
| High sound power - COOLING | | dB | 56 | 57 |
| High sound power - HEATING | | dB | 56 | 57 |
| Sound pressure - COOLING | | dB(A) | 36/32/29/15 | 37/33/30/16 |
| Sound pressure - HEATING | | dB(A) | 36/32/29/15 | 37/33/30/16 |
| Net dimensions | WxDxH | mm | 923x215x320 | 923x215x320 |
| Packaging dimensions | WxDxH | mm | 1032x318x418 | 1032x318x418 |
| Net/gross weight | | kg | 12,0/15,2 | 12,0/15,2 |
| Installation data | | | | |
| Liquid pipe | ∅ | mm | 6,35 (1/4) | 6,35 (1/4) |
| Gas pipe | ∅ | mm | 9,52 (3/8) | 9,52 (3/8) |
| Control | | | | |
| Standard | Remote control | | HQ-HJ | HQ-HJ |

AS25 - AS35

