



# **Necessity of ERV**

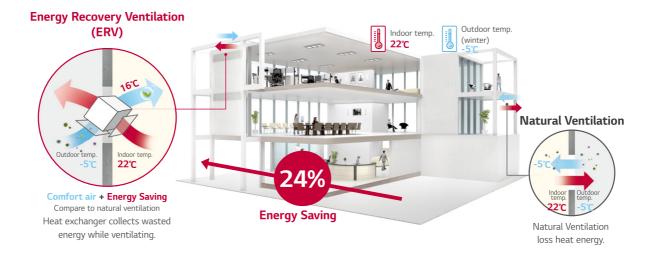


# **High Efficiency Heat Exchanger**

Efficiency and comfort is ensured through the high-efficiency energy recovery central core which recovers energy from outgoing indoor air and transfers it to the fresh incoming air without mixing the air stream.




# **Cross Flow System**

The exhaust system uses a high static sirocco fan to remove stale indoor air. Supply and exhaust air flows are completely separated in the heat exchanger, allowing the LG ERV to filter out particles before supplying outdoor air to ensure indoor air is fresh and healthy.



# **Night Time Free Cooling**

During summer nights, indoor heat can be discharged outdoors and cool outdoor air can be brought indoors for energy savings.

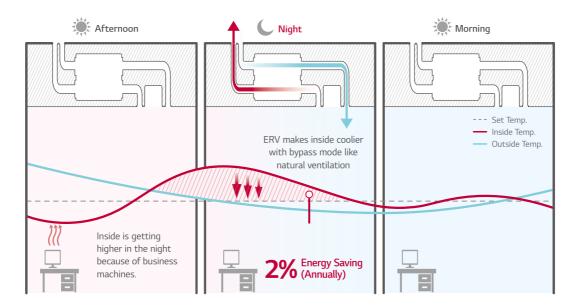


- \*\* This function is operated with 'Night Time Free Cooling' on remote controller (with MULTI V only)
   \*\* Energy saving ratio can be differed by weather condition.
   \*\* Test Condition

- \* lest Condition Office (49,000ft²) / Occupancy: 30 / Area: London, UK ERV (1000 CMH) + MULTI V 4 (12HP) Unit Combination Other conditions are subject to BREEAM.

# CO<sub>2</sub> Auto Operation


LG ERV reduces energy loss with auto fan speed control following CO<sub>2</sub> level.

- \* This function is operated with 'Night Time Free Cooling' on remote controller. (with MULTI V only)
- \*\* Energy saving ratio can be differed by weather condition.
   \*\* Test Condition Office (49,000ft²) / Occupancy: 30 / Area: London, UK ERV (1000 CMH) + MULTI V 4 (12+P) Unit Combination
   Other conditions are subject to BREEAM

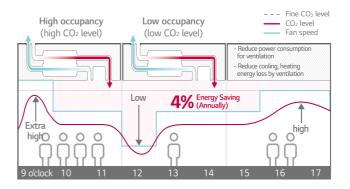

# **Seasonal Auto Operation**

LG ERV senses outdoor temperature and operates automatically following weather conditions.

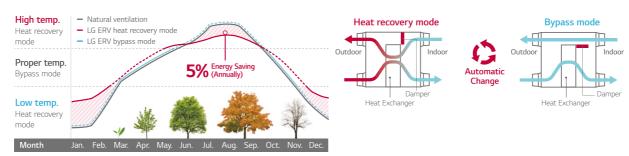


- \* This function is operated with 'Auto' mode by wired remote control
- Inis function is operated with Auto mode by wired remote control.
   Energy saving ratio can be differed by weather condition.
   Test Condition: Office (49,000ft²) / Occupancy: 30 / Area: London, UK
   ERV (1,000 CMH) + MULTI V 4 (12HP) Unit Combination
   Other conditions are subject to BREEAM

# **Delay Operation**

When the air conditioner and ERV are switched on simultaneously, delay operation can reduce unnecessary heating and cooling energy loss by slowing down automatic ERV operation.

- \* This function is operated with 'Night Time Free Cooling' on remote controller. Hins function is operated with Night Lime Free Cooling on remote controller (with MULTI V only)
   Energy saving ratio can be differed by weather condition.
   Test Condition - Office (49,000ft2) / Occupancy: 30 / Area: London, UK - ERV (100 CMH) + MULTI V 4 (12HP) Unit Combination
   Other conditions are subject to BREEAM

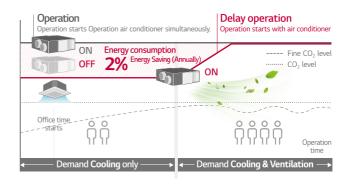

## CO<sub>2</sub> Level Monitoring

 $CO_2$  sensor senses  $CO_2$  level in the room. Users can monitor  $CO_2$  level on new wired remote controller, and ERV controls the fan speed automatically following the level.

### CO<sub>2</sub> Level Visualization

 $\mbox{CO}_2$  sensor senses indoor  $\mbox{CO}_2$  level and displays it on new wired remote controller.



### Main display

If the  $CO_2$  level is above 900ppm in the room, the red mark is on.



The remote controller screen image may

 $CO_2$ 

Applicable to only Standard III, Premium remote controller.

### **Further information**


 $CO_2$  level and room condition are displayed continuously.






# CO<sub>2</sub> Concentration Control


Using CO<sub>2</sub> sensor, LG ERV controls exhaust air flow automatically to keep indoor air fresh under settled CO<sub>2</sub> concentration.

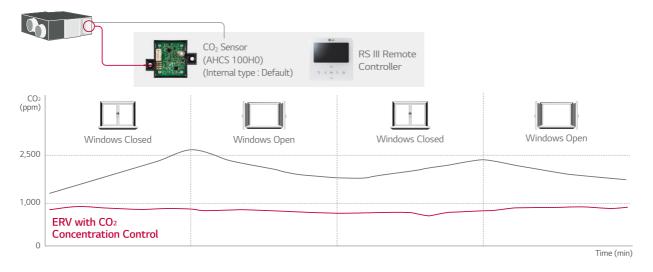

# **High Durability**

There is no moving part within the heat exchanger and therefore it has higher durability and reliability. The heat exchanger is made of special thin paper membranes which are bacteria-resistant to prevent harmful bacteria growth, and flame-retardant treated for fire safety.






## **Easy Control**

Wired remote controller is easy for usage.



## Easy

- · Navigation buttons, easy to use.
- Easy installation setting





## Display

- Indoor CO<sub>2</sub> level
- Alarm for filter change / remaining time to change filters



#### Convenient


- Flexible display
- Dual display with air conditioner
- Zoom selected directory to increase legibility

# **Group Control**

1 wired remote controller up to 16 ERV (Including air conditioner). It is convenient for large common space such as lobby.


## Several units combination

16 units group control is available with 1 remote controller.

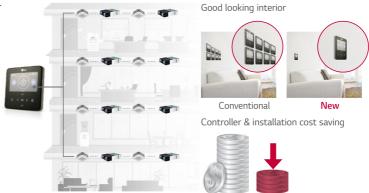

# Interlocking with Air Conditioning System


- LG ERV can be interlocked with air conditioners and controlled individually.
- This function can be operated when the system is connected with 1 remote controller.

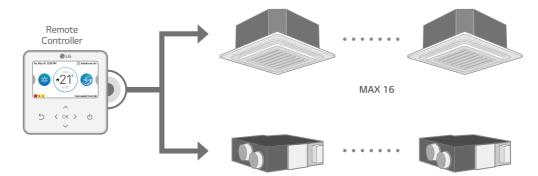

## **Fast Ventilation Mode**


Fast ventilation mode prevents the spread of contaminants under negative indoor pressure, and makes indoor air fresh and comfortable quickly.

## Only Exhausting






### **Fast Ventilation Mode**




## **External Static Pressure Control**

The high static pressure fan can control the air volume depending on the length of the duct. It is also easy to control the pressure level by using the remote controller for a more flexible duct installation and easier testing.



# Easy Cleaning and Filter Change

Filter can be conveniently changed and cleaned.



## LZ-H025GBA4 / LZ-H035GBA5 LZ-H050GBA5



	MODEL		UNIT	LZ-H025GBA4	LZ-H035GBA5	LZ-H050GBA5		
Dimensions (W x H x D)	Body		mm	988 x 273 x 1,014				
Weight	Body		kg	44				
Power Supply			Ø, V, Hz		1, 220-240, 50			
Normal Air flow			m³/h	250	350	500		
	Operating Step				Super-high / High / Low			
	Current SH / H / L		Α	0.70 / 0.60 / 0.42	1.05 / 0.90 / 0.50	1.65 / 1.56 / 0.80		
	Power Input	SH / H / L	W	97 / 87 /52	150 / 125 / 60	247 / 230 / 95		
	Air Flow	SH/H/L	m³/h	250 / 250 / 150	350 / 350 / 210	500 / 500 / 320		
	External Static Pressure	SH/H/L	Pa	100 / 70 / 50	150 / 100 / 50	150 / 100 / 50		
ERV Mode	Temperature Exchange Efficiency	SH/H/L	%	80 / 80 / 83	80 / 80 / 82	79 / 79 / 82		
	Enthalpy Exchange	Heating (SH / H / L)	%	70 / 70 / 72	75 / 75 / 80	75 / 75 / 78		
	Efficiency	Cooling (SH / H / L)	%	66 / 66 / 68	71 / 71 / 75	68 / 68 / 75		
	Energy Label	A+ to G Scale		А	В	В		
	Sound Pressure Level	SH/H/L	dB(A)	29 / 28/ 24	35 / 32 / 26	37 / 36 / 28		
	Sound Power Level	SH/H/L	dB(A)	50	53 / 50 / 42	57 / 56 / 46		
	Operating Step				Super-high / High / Low			
	Current	SH / H / L	Α	0.70 / 0.60 / 0.42	1.05 / 0.90 / 0.50	1.65 / 1.56 / 0.80		
Bypass Mode	Power Input	SH / H / L	W	97 / 87 /52	150 / 125 / 60	247 / 230 / 95		
bypass wode	Air Flow	SH/H/L	m³/h	250 / 250 / 150	350 / 350 / 210	500 / 500 / 320		
	External Static Pressure	SH / H / L	Pa	100 / 70 / 50	150 / 100 / 50	150 / 100 / 50		
	Sound Pressure Level	SH/H/L	dB(A)	29 / 29/ 25	35 / 33 / 26	37 / 37 / 28		
Duct Work		Qty	EA		4			
Duct Work		Size (Ø)	mm					
Supply Air Fan		Qty	EA					
Supply All Fall		Туре		Direct-Drive Sirocco				
Exhaust Air Fan		Qty	EA	1				
LAHAUST AH FAN		Туре						
		Qty	EA		2			
Filters		Туре			Cleanable fibrous fleeces			
		Size (W x H x D)	mm		855 x 10 x 166			

- Note:

  1. ERV mode: Total Heat Recovery Ventilation mode

  2. Refer to dimensional drawings.

  3. Noise level:

   The operating conditions are assumed to be standard

   Sound measured at 1.5m below the center the body.

   Sound level will vary depending on a range of factors such as the construction(acoustic absorption coefficient) of particular room in which the equipment is installed.

   The sound level will vary depending on a range of factors such as the construction(acoustic absorption coefficient) of particular room in which the equipment is installed.

   The sound level at the air discharge port is about 8 dB(A) higher than the unit's operating sound.

  4. Temperature and Enthalpy Exchange Efficiency at cooling Indoor Temperature: 26.5°C DB, 64.5% RH, Outdoor Temperature: 34.5°C DB, 75% RH

  5. Temperature and Enthalpy Exchange Efficiency at heating Indoor Temperature: 20.5°C DB, 59.5% RH, Outdoor Temperature: 5°C DB, 65% RH

  6. Temperature Exchange efficiency is tested at heating condition.

## **Accessories**

CHASSIS	LZ-H025GBA4 LZ-H035GBA5 LZ-H050GBA5					
Drain Pump	-					
Cassette Cover	-					
Refrigerant Leakage Detector	-					
EEV Kit	-					
Multi-tenant Power Module	-					
Robot Cleaner	-					
Pre Filter (Washable)	-					
Ion Generator	-					
CO <sub>2</sub> Sensor	0					
Ventilation Kit	-					
IR Receiver	-					
Zone Controller	-					
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB500 (Modbus)					
External Input (1 point)	-					
Wi-Fi	-					

※ ○ : Applied, - : Not applied Option : Refer to model name in table





	MODEL		UNIT	LZ-H080GBA5	LZ-H100GBA5	LZ-H150GBA5	LZ-H200GBA5	
Dimensions (W x H x D)	Body		mm	1,101 x 405 x 1,230		1,353 x 815 x 1,230		
Weight	Body		kg	63		130		
Power Supply			Ø, V, Hz	1, 220-240, 50		1, 220-240, 50		
Normal Air flow			m³/h	800 1,000		1,500 2,000		
	Operating Step			Super-high / High / Low		Super-high / High / Low		
	Current	SH/H/L	Α	2.13 / 1.75 / 1.00	2.92 / 2.38 / 1.40	4.26 / 3.50 / 2.00	5.92 / 4.76 / 2.80	
	Power Input	SH/H/L	W	328 / 266 / 144	463 / 370 / 208	660 / 530 / 290	926 / 740 / 420	
	Air Flow	SH/H/L	m³/h	800 / 800/ 660	1,000 / 1,000 / 800	1,500 / 1,500 / 1,200	2,000 / 2,000 / 1,600	
ERV Mode	External Static Pressure	SH/H/L	Pa	160 / 100 / 50	160 / 100 / 50	160 / 100 / 50	160 / 100 / 50	
ERV Mode	Temperature Exchange Efficiency	SH/H/L	%	82 / 82 / 83	80 / 80 / 81	82 / 82 / 83	80 / 80 / 81	
	Enthalpy Exchange	Heating (SH / H / L)	%	73 / 73 / 76	71 / 71/ 73	73 / 73 / 76	71 / 71/ 73	
	Efficiency	Cooling (SH / H / L)	%	66 / 66 / 70	64 / 64 / 67	66 / 66 / 70	64 / 64 / 67	
	Sound Pressure Level	SH/H/L	dB(A)	40 / 36 / 32	40 / 37 / 33	43 / 39 / 35	43 / 40 / 36	
	Sound Power Level	SH/H/L	dB(A)	56 / 53 / 47	59 / 56 / 52	59 / 56 / 50	62 / 59 / 55	
	Operating Step			Super-high / High / Low		Super-high / High / Low		
	Current	SH/H/L	Α	2.13 / 1.75 / 1.00	2.92 / 2.38 / 1.40	4.26 / 3.50 / 2.00	5.92 / 4.76 / 2.80	
	Power Input	SH/H/L	W	328 / 266 / 144	463 / 370 / 208	660 / 530 / 290	926 / 740 / 420	
Bypass Mode	Air Flow	SH/H/L	m³/h	800 / 800/ 660	1,000 / 1,000 / 800	1,500 / 1,500 / 1,200	2,000 / 2,000 / 1,600	
	External Static Pressure	SH / H / L	Pa	160 / 100 / 50	160 / 100 / 50	160 / 100 / 50	160 / 100 / 50	
	Sound Pressure Level	SH / H / L	dB(A)	41 / 37 / 33	41 / 38 / 34	44 / 40 / 36	44/41/37	
Duct Work		Qty	EA	4		4 + 2		
Duct Work		Size (Ø)	mm	Ø250		Ø250 + Ø350		
Supply Air Fan		Qty	EA	1		2		
Supply All I all		Туре		Direct-Drive Sirocco		Direct-Drive Sirocco		
Exhaust Air Fan		Qty	EA	1		2		
LAHAUST AH FAN		Туре		Direct-Drive Sirocco		Direct-Drive Sirocco		
		Qty	EA	2		4		
Filters		Туре		Cleanable fibrous fleeces		Cleanable fibrous fleeces		
	Size (W x H x D)		mm	1,148 x 6 x 245		1,148 x 6 x 245		

- Note:

  1. ERV mode: Total Heat Recovery Ventilation mode

  2. Refer to dimensional drawings.

  3. Noise level:

   The operating conditions are assumed to be standard

   Sound measured at 1.5m below the center the body.

   Sound level will vary depending on a range of factors such as the construction(acoustic absorption coefficient) of particular room in which the equipment is installed.

   The sound level at the air discharge port is about 8 dB(A) higher than the unit's operating sound.

  4. Temperature and Enthalpy Exchange Efficiency at cooling Indoor Temperature: 26.5°C DB, 64.5% RH, Outdoor Temperature: 34.5°C DB, 75% RH

  5. Temperature and Enthalpy Exchange Efficiency at heating Indoor Temperature: 20.5°C DB, 59.5% RH, Outdoor Temperature: 5°C DB, 65% RH

  6. Temperature Exchange efficiency is tested at heating condition.


## Accessories

CHASSIS	LZ-H080GBA5 LZ-H100GBA5 LZ-H150GBA5 LZ-H200GBA5
Drain Pump	-
Cassette Cover	-
Refrigerant Leakage Detector	-
EEV Kit	-
Multi-tenant Power Module	-
Robot Cleaner	-
Pre Filter (Washable)	-
Ion Generator	-
CO <sub>2</sub> Sensor	0
Ventilation Kit	-
IR Receiver	-
Zone Controller	-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB500 (Modbus)
External Input (1 point)	-
Wi-Fi	-

※ ○ : Applied, - : Not applied Option : Refer to model name in table


# **Providing Cool & Warm Fresh Air**

During the summer, ERV DX can transform outdoor warm air into cool air for indoors, and it can prevent cold draft during the winter by supplying warm air.

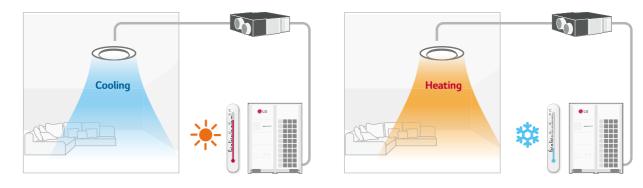


# **Total Air Conditioning Solution**

LG ERV DX can be used as a Total Air Conditioning Solution. It can control condition of incoming air with the DX coil and humidifier for making comfortable indoor air. In the summer, LG ERV DX provides air conditioning by cooling and dehumidifying incoming air. During winter, warm air is provided by heating and humidifying incoming air.

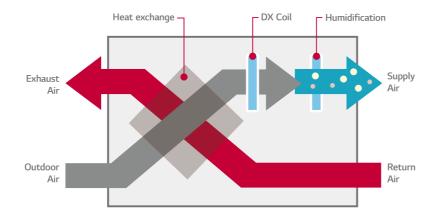

# Interlocking with MULTI V

LG ERV DX can be interlocked with MULTI V. It can be controlled individually by a wired remote controller connected to MULTI V indoor units.

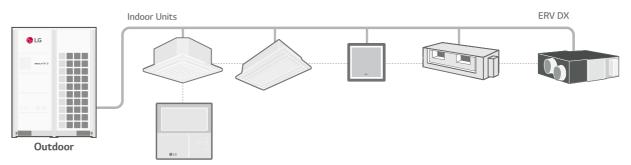

## LZ-H050GXH4 / LZ-H080GXH4 LZ-H100GXH4 / LZ-H050GXN4 LZ-H080GXN4 / LZ-H100GXN4



	MODEL		LZ-H050GXH4	LZ-H080GXH4	LZ-H100GXH4	LZ-H050GXN4	LZ-H080GXN4	LZ-H100GXN4	
Fresh Air	Cooling	kW	4.93	7.46	9.12	4.93	7.46	9.12	
Conditioning Load	Heating	kW	6.73	9.80	11.72	6.73	9.80	11.72	
Temperature Exchange Efficiency	SH/H/L	%	86 / 86 / 87	80 / 80 / 81	76 / 76 / 78	86 / 86 / 87	80 / 80 / 81	76 / 76 / 78	
Enthalpy Exchange	Cooling (SH / H / L)	%	61 / 61 / 63	50 / 50 / 53	45 / 45 / 50	61 / 61 / 63	50 / 50 / 53	45 / 45 / 50	
Efficiency	Heating (SH / H / L)	%	76 / 76 / 77	67/67/69	64 / 64 / 66	76 / 76 / 77	67 / 67 / 69	64 / 64 / 66	
Operation Range	Outdoor air Temperature	°C	-15 ~ 45	-15 ~ 45	-15 ~ 45	-15 ~ 45	-15 ~ 45	-15 ~ 45	
Air Flow Rate	Heat Exchange Mode (SH / H / L)	CMH	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820	
7 III T IOW NACE	Bypass Mode (SH / H / L)	CMH	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820	
Fan	External Static Pressure (SH / H / L)	Pa	160 / 120 / 100	140 / 90 / 70	110 / 70 / 60	180 / 150 / 110	170 / 120 / 80	150 / 100 / 70	
	System		Natural Evaporating Type			-			
Humidifier	Amount	kg/h	2.70	4.00	5.40		-		
	Pressure Feed Water	Мра		0.02 ~ 0.49			-		
Sound Pressure	Heat Exchange Mode (SH / H / L)	dB(A)	38 / 36 / 33	39 / 37 / 34	40 / 38 / 35	39 / 37 / 35	41 / 38 / 36	41 / 39 / 36	
	Bypass Mode (SH / H / L)	dB(A)	39 / 37 / 34	40 / 38 / 35	40 / 38 / 35	39 / 37 / 35	41 / 38 / 36	41 / 39 / 36	
Refrigerant		R410A							
Power Supply Ø, V, Hz			1, 220-240, 50,60						
Power Input (Nominal)	Heat Exchange Mode (SH / H / L)	kW					0.42 / 0.35 / 0.25		
(Norminal)	Bypass Mode (SH / H / L)	kW	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27	
Nominal Running Current (RLA)	Heat Exchange Mode (SH / H / L)	А	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	
Current (RLA)	Bypass Mode (SH / H / L)	Α	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	
Heat Exchange System			Air to air cross flow total heat (Sensible + Latent heat) exchange			Air to air cross flow total heat (Sensible + Latent heat) exchange			
Heat Exchange Element			Specially processed non-flammable paper			Specially processed non-flammable paper			
Air Filter			Multidirectional fibrous fleeces			Multidirectional fibrous fleeces			
Dimensions	WxHxD	mm	1,667 x 365 x 1,140 1,667 x 365 x 1,140			)			
Net Weight		kg	105			98			
Piping	Liquid	mm	Ø6.35			Ø6.35			
	Gas	mm	Ø12.7			Ø12.7			
Connection	Water	mm		Ø6.35			-		
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)			Ø25 (1)			
Connection Duct Diameter mm		Ø250			Ø250				

- Note:

  1. Cooling Capacity Test condition Indoor temperature: 27°C DB, 19°C WB / Outdoor temperature: 35°C DB

  2. Heating Capacity Test condition Indoor temperature: 20°C DB / Outdoor temperature: 7°C DB, 6°C WB

  3. Humidifying capacity is based on the following conditions Indoor temperature: 20°C DB, 15°C WB / Outdoor temperature: 7°C DB, 6°C WB

  4. Cooling and heating capacities are based on the following conditions: Fan is based on High and Super-high.

  5. The operating sound measured at the point 1.5 m below the center of the unit is converted to that measured at an anechoic chamber.

  6. The specifications, designs and information here are subject to change without notice.

## Accessories

CHASSIS	LZ-H050GXH4 LZ-H080GXH4 LZ-H100GXH4 LZ-H050GXN4 LZ-H080GXN4 LZ-H100GXN4					
Drain Pump	÷					
Cassette Cover	·					
Refrigerant Leakage Detector	PRLDNVS0					
EEV Kit	·					
Multi-tenant Power Module	·					
Robot Cleaner						
Pre Filter (Washable)	-					
Ion Generator	·					
CO <sub>2</sub> Sensor	AHCS100H0					
Ventilation Kit						
IR Receiver	·					
Zone Controller						
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB500 (Modbus)					
External Input (1 point)	0					
Wi-Fi	·					

※ ○ : Applied, - : Not applied Option : Refer to model name in table