





Dimensions



Materials of parts

Part	Material
Cap	Aluminum
Case	Phenolic resin
Spring	Beryllium Copper alloy
Rivet	Copper
Contacts	Silver
Terminal	Brass

Structure

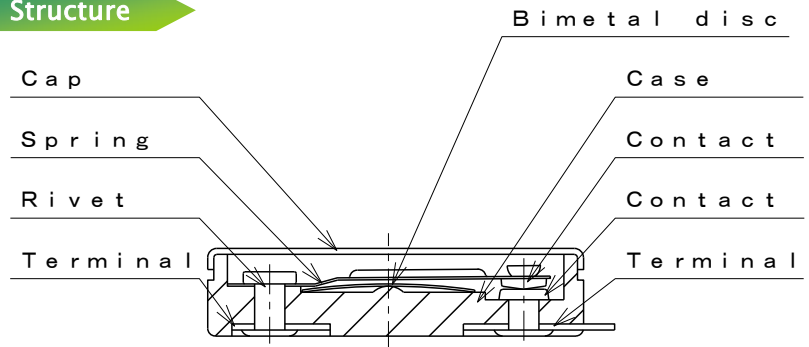

Specification

★Compliance with RoHS Directives

Item	Specification
1. Basic features	SPST Automatic reset
2. Operation	L : Contacts open on temperature rise
3. Electrical rating	AC125V/6A AC250V/3A (Separately, the insulation protection is necessary) DC12V/5A
4. Calibration method	Hot & cold air circulation system
5. Temperature rating	Operating temperature Max. 70°C
6. Insulation resistance	Not less than 1,000MΩ/DC500V