



**Dimensions**

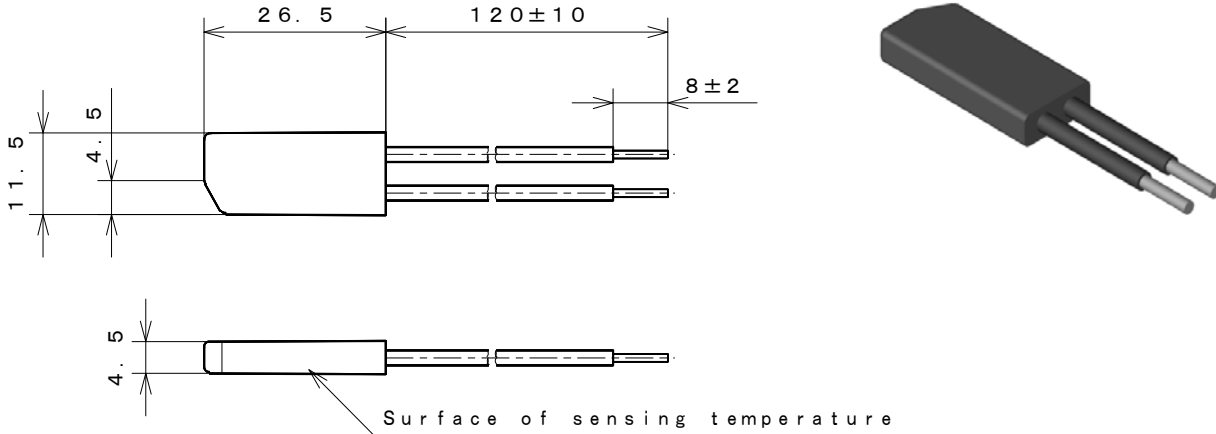

**Features**

- 😊 Low profile & High current version  
Rating up to DC16V/30A
- 😊 The smallest self heating structure!  
This makes your temp designing easy  
Not only Thermal protection  
but also Thermal control is possible
- 😊 Application: Car seat heating, Car Steering Heater

**Comparison with type MH4**

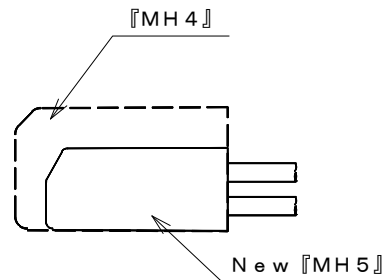

- \* Width about **-6** mm
- \* Height about **-4.5** mm
- \* Thickness about **-2** mm

**Specification**

★Compliance with RoHS Directives

Item	Specification
1. Basic features	SPST Automatic reset
2. Operation	L : Contacts open on temperature rise F : Contacts close on temperature rise
3. Electrical rating	AC250V/ 4A (Min:AC6V/50mA) DC16V/30A (Min:DC5V/50mA)
4. Temperature rating	Operating temperature Max. 100°C / Min. 20°C
5. Temperature test condition	1°C/2min. Measured by LED loaded 20mA or Less, Hot air circulation system of NGT manufacture
6. Insulation resistance	Not less than 1,000MΩ/DC500V
7. Dielectric resistance	Not less than AC1,500V/1min. AC1,800V / 1sec.

※ Please feel free to ask us in case that electrical rating is not standard mentioned above.