


Small Size - Engineered Plastics

LS-7 Series—Compact Side Mounts are the Solution to Many Small Tanks

These low-cost units are ideal for high volume use in small tanks and vessels. Engineered plastics construction offers broad compatibility in water, oils and chemicals.

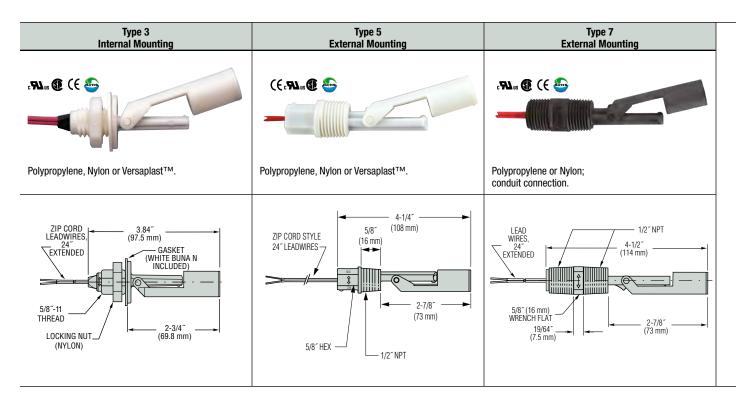

Common Specifications

Switch Rating*: SPST, 20VA Lead Wire Gauge: No. 22 AWG Mounting Attitude: Horizontal.

RoHS: In compliance with EU-directive 2011/65/EC requirements for chemicals and substances.

Approvals

Material	CE	UL Recognized File No. E45168	cUL Recognized	CSA Listed- File No. 30200	NSF Listed Mat. Std. 169	
Nylon	Х	Х	Х	Х		
Polypropylene	Х	Х	Х	Х	Х	
Noryl®	Х	Х	Х		Х	
Versaplast™	Х	Х	Х			


Media Compatibility

Media	LS-7 Compatible Types		
Oil, Fuel, Hydrocarbons	Nylon		
Broad Range of Chemicals and Water	Polypropylene		
Limited Chemicals and Water	Noryl [®]		
Oil, Antifreeze, High Temperatures, Corrosive Fluids, Various Chemicals	Versaplast™		


Switch Operation

liquid level, the switch is N.O.


Depending on the mounting position, the float on these switches can rise or lower with the liquid level. By rotating the switch 180°, the switch operation can be Normally Open or Normally Closed (except Type 12).



Type 12 – N.C. "Drop Float" Design




The LS-7 Type 12 is ideal for use on food warmers, hot water heaters, steam cookers, small boilers or wherever water evaporation occurs. The switch is used effectively for either high fluid level alarms or water make up systems. The units are made of Noryl®, which carries NSF approval for use in potable water, and are supplied with FDA-approved Buna gaskets.



See "Electrical Data" on Page X-5 for more information.

- Nylon is ideal for oils and fuels.
- NSF Standard 169 polypropylene is ideal for potable water and broad chemicals.
- Versaplast™ is ideal for corrosive fluids, hot water, antifreeze, chemicals and oils.

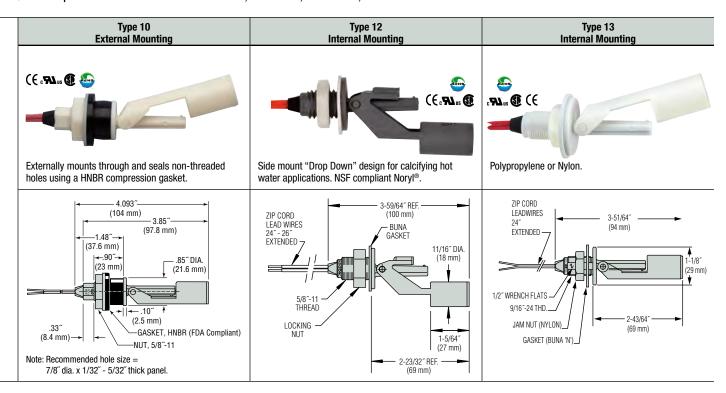

How To Order – Select Part Number based on specifications required.

Mounting - Type	Materials*			Min.		Oneveting	Float	Dout
	Stem and Mounting	Float	Lead Wire Jacket	Liquid Sp. Gr.	Operating Temperature	Operating Pressure, Max.	Arc Envelope	Part Number
	Nylon		TPE [†]	.65	-40°F to +250°F (-40°C to +121.1°C)	100 psi @ 70°F - (6.8 bar @ 20°C)	2.20	165570 🗲
3	Polypropylene			.55	-40°F to +225°F (-40°C to +107.2°C)			164520 🗲
	Versaplast™			.80	-40°F to +250°F (-40°C to +121.1°C)			182600
5	Polypropylene		TPE†	.55	-40°F to +225°F (-40°C to +107.2°C)	100 psi @ 70°F (6.8 bar @ 20°C)	1.25	131100 🗲
	Nylon			.65	-40°F to +250°F (-40°C to +121.1°C)			140620 🗲
	Versaplast™		Teflon®	.80	-40°F to +300°F (-40°C to +148.9°C)			177100 🗲
5 - BSP	Versaplast™		TPE†	.80	-40°F to +250°F (-40°C to +121.1°C)	100 psi @ 70°F (6.8 bar @ 20°C)	1.25	189422
7	Polypro	Polypropylene		.55	-40°F to +225°F (-40°C to +107.2°C)	100 psi @ 70°F (6.8 bar @ 20°C)	1.50	160450 🗲
/	Nylon		TPE [†]	.65	-40°F to +250°F (-40°C to +121.1°C)			160460 🗲
10	Polypropylene		TPE†	.55	-40°F to +225°F (-40°C to +107.2°C)	50 psi @ 70°F (3.4 bar @ 20°C)	2.08	165800 🗲
	Nylon			.65	-40°F to +250°F (-40°C to +121.1°C)			165900
12	Noryl [®]		TPE†	.80	-40°F to +225°F (-40°C to +107.2°C)	100 psi @ 70°F (6.8 bar @ 20°C)	.70	191080 🗲
13	Polypropylene		TPE†	.55	-40°F to +225°F (-40°C to +107.2°C)	100 psi @ 70°F (6.8 bar @ 20°C)	2.20	197050

^{*} Polysulfone and Ryton® R-4 are available upon request.

Note: NSF 169 Versions available. Contact factory.

✓ – Stock Items.

See alloy versions on next page.

[†] Thermoplastic Elastomer Zip Cord, 22 AWG.