

CP - CP/T - CP/TW - CP/I - CP/IW PVC insulated cables

Characteristics

• Power cable: standard length: 1 m.

• CP : PVC insulated cables.

· CP/T : with tinned copper braid and earthing conductor.

• CP/TW : with tinned copper braid no earthing conductor.

· CP/I : with stainless steel braid

and earthing conductor.

Applications


CP, CP/T, CP/TW, CP/I and CP/IW heating cables are mainly used in the household electrical and refrigeration industries and for equipment where protection against freezing or temperature maintenance is necessary.







To ensure that these heating elements enjoy a long service life, we recommend using a control device.

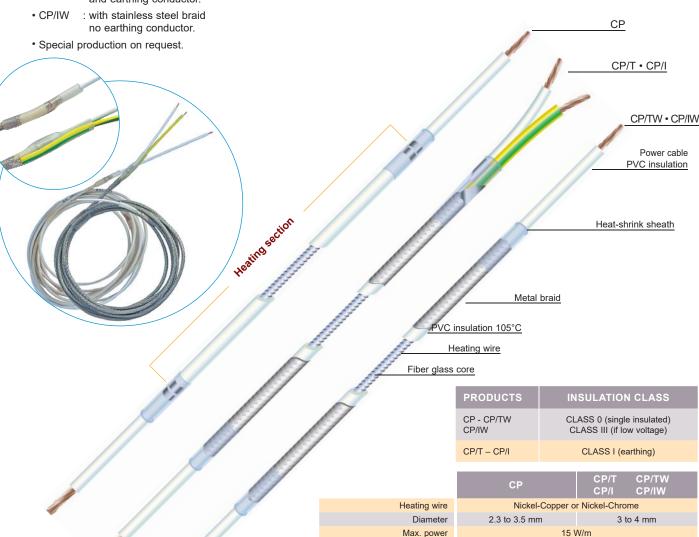

Use

Heating cables are series resistors. Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.



Minimum bending radius TO TALK TO OUR EXPERT TEAM, CALL +44 (0)1483 869 070 OR

EMAIL INDUSTRIAL@HAWCO.CO.UK

Voltage

temperature

Tolerances

Permissible surface

Connection insulation

Ingress protection code



Any voltage on request up to 500 V

from - 30°C to + 105°C

Power: ± 10 % Diameter: + 0.2 / - 0.1 mm

Length: ±1%

Heat-shrink sheath with adhesive

IP 55

6 x the diameter



CS - CS/T - CS/TW - CS/I - CS/IW Silicon elastomer insulated cables

Characteristics

· Connection insulated with a silicon moulding.

• Power cable: standard length: 1 m.

· CS : silicon elastomer insulated cables.

· CS/T : with tinned copper braid

and earthing conductor.

• CS/TW : with tinned copper braid for mechanical

protection, no earthing conductor.

· CS/I : with stainless steel braid and earthing conductor.

 CS/IW : with stainless steel braid for mechanical protection,

Applications

CS, CS/T, CS/TW, CS/I and CS/IW heating cables are mainly used in the household electrical and refrigeration industries and for equipment where protection against freezing or temperature maintenance is necessary.

To ensure that these heating elements enjoy a long service life, we recommend using a control device.






CS/TW CS/IW



CS

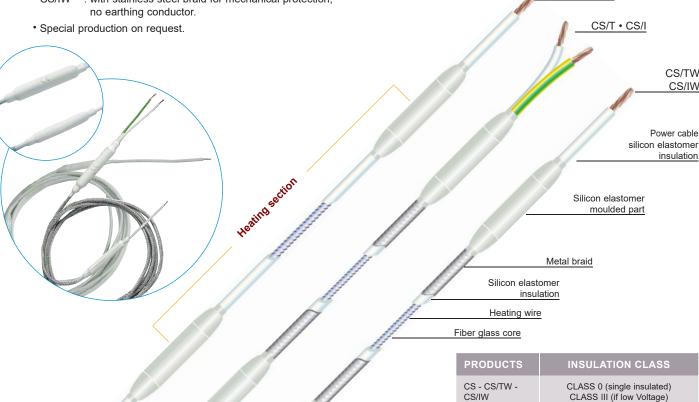

Diameter Max. power Voltage Permissible surface temperature Tolerances

Heating wire

CP/T - CP/I

Connection insulation Ingress protection code Minimum bending radius

Nickel-Copper or Nickel-Chrome 2.3 to 3.5 mm 3 to 4 mm 30 W/m Any voltage on request up to 500 V from - 70°C to + 200°C Power : ± 10 % Diameter: + 0.2 / - 0.1 mm Length: ± 1 % Sealed silicon moulding IP 66

6 x the diameter



Heating cables are series resistors. Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.



TO TALK TO OUR EXPERT TEAM, CALL +44 (0)1483 869 070 OR EMAIL INDUSTRIAL@HAWCO.CO.UK



CLASS I (earthing)



CP₁

Terminated PVC insulated cables

Characteristics

The main characteristic of this type of cable is that there is no extra thickness at the cold junction, identified with a black mark


- su cables on request.
- · Special production on request.

Applications

CP1 heating cables are mainly incorporated in household electrical or refrigeration equipment and special, mass-produced machines requiring protection against freezing or temperature maintenance.



To ensure that these heating elements enjoy a long service life, we recommend using a control device.

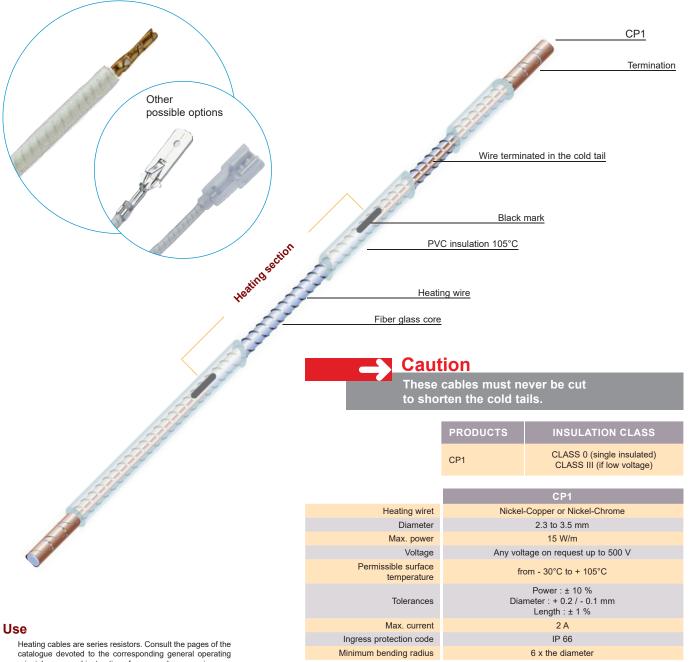

principles, general instructions for use and accessories.



TO TALK TO OUR EXPERT TEAM, CALL **+44 (0)1483 869 070** OR EMAIL INDUSTRIAL@HAWCO.CO.UK





CS₁

Terminated silicon elastomer insulated cables

Characteristics

The main characteristic of this type of cable is that there is no extra thickness at the cold junction, identified with a black mark.


- 🔊 cables on request.
- · Special production on request.

Applications

CS1 heating cables are mainly incorporated in household electrical or refrigeration equipment and special, mass-produced machines requiring protection against freezing or temperature maintenance.



To ensure that these heating elements enjoy a long service life, we recommend using a control device.

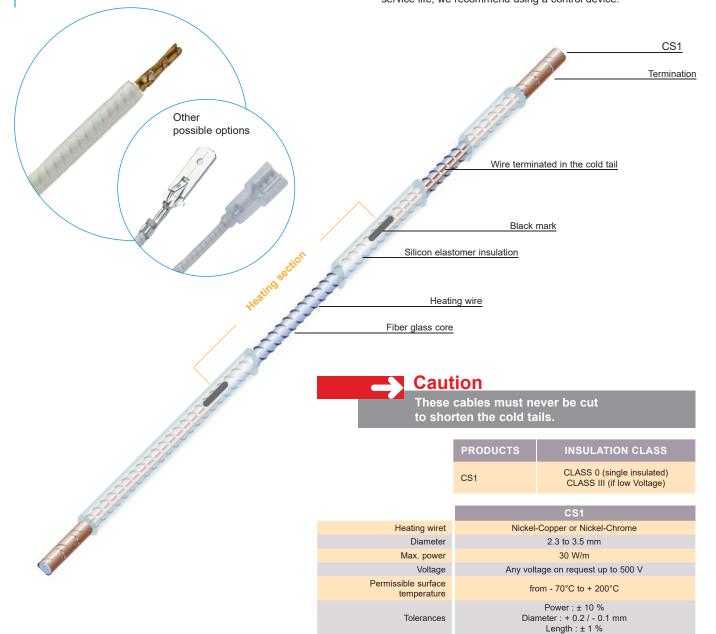

Use

Heating cables are series resistors. Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.



TO TALK TO OUR EXPERT TEAM, CALL **+44 (0)1483 869 070** OR EMAIL **INDUSTRIAL@HAWCO.CO.UK**

Max.current

Ingress protection code

Minimum bending radius



IP 66

6 x the diameter



CS2 - CS2/T - CS2/TW - CS2/I - CS2/IW Silicon elastomer insulated cables

Characteristics

· Power cable: standard length: 1 m.

CS2 : Silicon elastomer insulated cables

• CS2/T : with tinned copper braid and earthing conductor.

CS2/I: : with stainless steel braid

and earthing conductor.


CS2/TW: with tinned copper braid for mechanical protection, no earthing conductor.

Applications

CS2, CS2/T, CS2/I, CS2/TW and CS2/IW heating cables are mainly used in the household electrical and refrigeration industries and for machines where protection against freezing or temperature maintenance is necessary.

To ensure that these heating elements enjoy a long service life, we recommend using a control device.



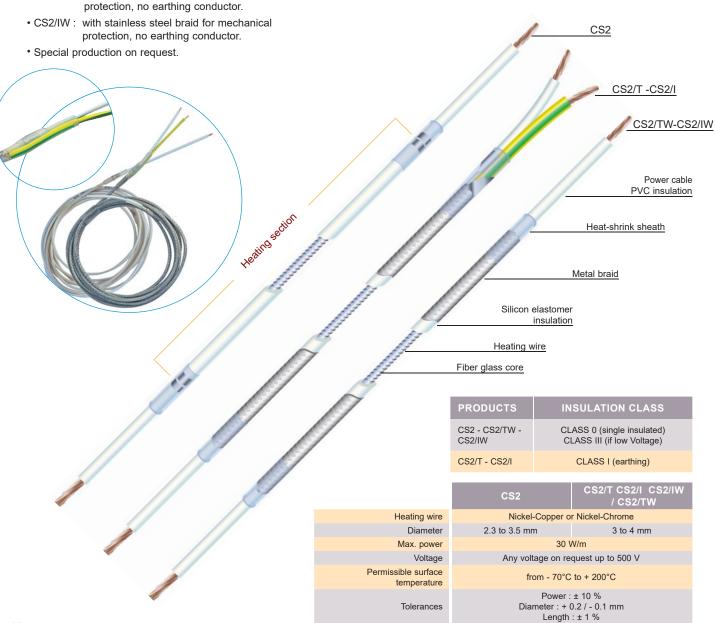

Use

Heating cables are series resistors. Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.



TO TALK TO OUR EXPERT TEAM, CALL **+44 (0)1483 869 070** OR EMAIL **INDUSTRIAL@HAWCO.CO.UK**

Connection insulation

Ingress protection code

Minimum bending radius



Heat-shrink sheath with adhesive

IP 54

6 x the diameter