

OPTIDRIVE COOVERT

High Performance Drive specifically for BLDC Compressors, Heat Pumps & CDUs



OPTIDRIVE™ CO© Vert

High Performance Drive

Invertek's high-performance OPTIDRIVETM
CoolVert; designed specifically for
machine builders to optimise the
performance of BLDC compressors
used in Heat Pumps and Condensing
Units (CDUs), improving overall system
performance and lowering energy costs.





Experience You Can Trust

Invertek Drives has been manufacturing AC variable speed drives since 1998. During this time, our brushless permanent magnet motor control technology has been successfully used on 100's of different AC motor designs.

State of the art UK headquarters house specialist facilities for innovation, manufacturing and global marketing.

The company has achieved the ISO 14001 Environmental Management System to enhance environmental performance.

All operations, including innovation, are accredited to the exacting customer focused ISO 9001 quality standard.

The company's products are sold globally by a network of specialist distributors in over 80 different countries. Invertek Drives' unique and innovative Optidrive range is designed for ease of use and meets recognised international design standards for CE (Europe) and cUL (USA and Canada).

Key Product Features

Open Connectivity & Easy Commissioning

- Seamless connectivity with any application controller
- Built in RS485 Modbus RTU
- Bluetooth connectivity available via Optistick Smart
- External TFT keypad available
- Drive status LEDs

Environmental

- Compact design with through panel mounting
- Wide operating temperature:
 -20°C to 60°C
- IP20 rated front enclosure, IP55 at the rear
- Coldplate version available
- Coated PCBs meet class 3C2 in accordance with EN60713-303
- Built-in EMC filter class C1 in accordance with EN61800-3-2004
- Low harmonic design compliant with; EN61000-3-2, (1 phase 200-230V input), and EN61000-3-12, (3 phase 380-480V input).

Supply voltages and output current range

- 1 x 200–240V (± 10%):
 7.0A, 12A, 16A, 20A
 All single phase drives with active PFC
- 3 x 380–480V (± 10%): 14A, 18A, 24A

Selectable motor types

- AC Induction (IM)
- AC Permanent Magnet (PM)
- Brushless DC (BLDC),
- Synchronous Reluctance (SynRM)
- Line Start Permanent Magnet (LSPM)

Control Terminals

- Pluggable control and communication terminals
- STO SIL3 Safe Torque Off for system protection, TUV approved
- Programmable, predefined input and output functions:
 - Start / Stop (Enable / Disable)
 - PTC motor thermal protection (0-10V, 4-20mA)
 - Relay (drive healthy / trip)



Sensorless Vector Control for all Motor Types










SynRM Synchronous Reluctance Motors LSPM
Line Start PM
Motors

Precise and reliable control for IE2, IE3, IE4 & IE5 motors



Through panel mounting allows the drive power electronics to be cooled by the chilled air.

Allowing OEM's to select the smallest electrical panel size, for the control electronics, while safely removing the heat generated by the drive, and maintaining IP rating.




IP20


Front


IP55

Rear

Heatsink Version (dimensions in mm)










NOTE: The Heatsink Version can be conventionally mounted on the backplate of a panel using the optional panel mounting kit (sold separately)

Coldplate Version (dimensions in mm)







Coldplate Version

Specifications are identical to the standard Coolvert except the heatsink is replaced with a flat aluminium coldplate. This allows the Coolvert to be fixed to a device containing its own heat exchanger which then dissipates the heat from the drive.

OPTIDRIVE™ CO⊝Ivert

CV - 2 2 0070 - 1 F # P 1.5 7.0 2 200-240V±10% 3 4 12 2 CV - 2 2 0012 - 1 F # P CV - 2 2 0160 - 1 F # P 380-4

Options for commissioning & diagnostics

NFC

Bluetooth[®]

Optistick Smart Rapid Commissioning Tool OPT-3-STICK-IN

- Copying, backup and restore of drive parameters Bluetooth interface to a PC running OptiTools Studio or the OptiTools Mobile app on a smartphone
- Onboard NFC (Near Field Communication) for rapid data transfer




Optipad

OPT-3-OPPAD-IN

Remote Keypad with TFT Display

		0.0	10.0	_	_	C7 2 2 0 100 1 1 # 1	0.00
	5.5	7.5	20.0	2		CV - 2 2 0200 - 1 F # P	STO
							4
480V ± 10% hase Input	5.5	7.5	14	2		CV - 2 4 0140 - 3 F # E	0 0
	7.5	10	18	2		CV - 2 4 0180 - 3 F # E	
	11	15	24	2		CV - 2 4 0240 - 3 F # E	

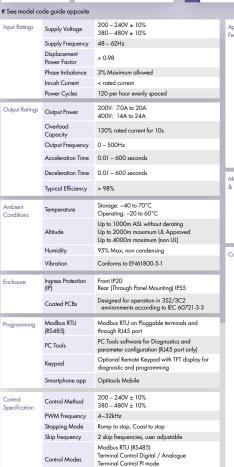

Master / Slave Mode

SIL 3

PL "e"


SIL 3

SILCL 3


TUV Rheinland

pplication atures	PI Control	Internal PI Controller						
	Demagnetisation Protection	Configurable over-current trip threshold for greater protection against demagnetisation of the motor						
	Start-up Profile	Three stage configurable start-up profile to ensure lubrication and increased compressor lifetime						
	Start/Stop Blocking Features	Configurable Minimum On Time, Minimum off Time and Minimum Re-Start Delay to reduce oil migration and maximise compressor lifetime						
	Serial Communications Loss Fall-Back Speed	The ability to configure the drive to run at a 'safe' speed in the even of a loss of serial communication. Can prevent total loss of operation whilst maintaining minimum process demands						
aintenance	Fault Memory	Last 3 trips stored with time stamp						
Diagnostics	Data Logging	Logging of data prior to trip for diagnostic purposes: Output Current Drive Temperature DC Bus Voltage						
	Monitoring	Hours Run Meter kWH						
onformance	The Coolvert product range conforms to the relevant safety provisions of the following council directives: 2014/30/EU (EMC), 2014/35/EU [EMC], 2004/42/EC (Machinery Directive), 2011/65/EU (RoHS 2) and 2009/125/EC (Eco-design)							
	Design and manufacture is in accordance with the following harmonised European standards:							
	BSEN 61800-5-1: 20 & A1: 2017	007	Adjustable speed electrical power drive systems. Safety requirements. Electrical, thermal and energy.					
	BSEN 61800-3:2018	3	Adjustable speed electrical power drive systems. Part 3: EMC requirements and specific test methods (IEC 61800-3:2017).					
	BSEN 61800-9-2:20	17	Adjustable speed electrical power drive systems. Part P-2: Ecodesign for power drive systems, motor starters, power electronics and their driven applications – Energy efficiency indicators for power drive systems and motor starter. IJEC 6180-09-2: 20171					

	- KVVH									
nce	The Coolvert product range conforms to the relevant safety provisions of the following council directives: 2014/30/EU [EMC], 2014/35/EU [EVC], 2006/42/EC (Machinery Directive), 2011/65/EU [RoHS 2] and 2009/125/EC [Eco-design]									
	Design and manufacture is in accordance with the following harmonised European standards:									
	BSEN 61800-5-1: 2007 & A1: 2017	Adjustable speed electrical power drive systems. Safety requirements. Electrical, thermal and energy.								
	BSEN 61800-3:2018	Adjustable speed electrical power drive systems. Part 3: EMC requirements and specific test methods (IEC 61800-3:2017).								
	BSEN 61800-9-2:2017	Adjustable speed electrical power drive systems. Part P-2: Ecodesign for power drive systems, motor starters, power electronics and their driven applications – Energy efficiency indicators for power drive systems and motor starters (IEC 61800-9-2:2017).								
	BSEN 60529: 1992 & A2: 2013	Specifications for degrees of protection provided by enclosures								
	BSEN 61800-5-2:2017	Adjustable speed electrical power drive systems.[as relevant] Part 5:2: Safety requirements – Functional (IEC 61800-5:2:2016).								
	UL 61800-5-1	cUL Listed * cUR Recognised for the coldplate variants *								
	BSEN 61000-3-12: 2011	Electromagnetic compatibility (EMC) - Part 3-12: Limits - Limits for harmonic currents produced by equipment connected to public low voltage systems with input current >16 A and ≤ 75 A per phase								
	BSEN 61000-3-2:2019 (single phase input variants only)	Electromagnetic compatibility (EMC). Limits - Limits for harmonic current emissions (equipment input current ≤16 A per phase)								



Connection Diagram

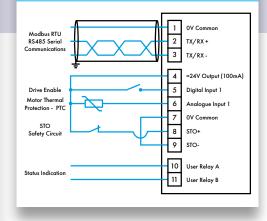







www.invertekdrives.com

IEC 61800-5-2:2016

EN ISO 13849-1:2015

Independent Approval

EN 61508 (Part 1 to 7): 2010

EN 60204-1: 2006 & A1: 2009 FN 62061: 2005 & A2: 2015

INVERTEK DRIVES LIMITED UK Headquarters

Offa's Dyke Business Park Welshpool, Powys, UK SY21 BJF

f y in 🖸

Tel: +44 (0)1938 556868 +44 (0)1938 556869 Fax: Email: sales@invertekdrives.com











