



PATENT PENDING

DATASHEET

Penta 200 Fanpack



SPECIFICATION

Rated voltage	120 / 230Vac (+/-10%), 50/60Hz
Temperature range	-40°C to +50°C
Rated current	0.42A / 0.25A
Absorbed power	0-25W
Rated speed	400 to 2250rpm (+/-1%)
Speed selection	3 discrete programmable speeds.
Direction of rotation	CCW, CW, reversible
Reverse Speed	Timed reverse programmable options.
Motor Protection	Electronically / Thermally Protected
Ground Protection	Double Insulation
Insulation Class	Class B
Bearing	608 sealed ball bearings
Approvals	UL / TÜV / CE / RCM / CCC / ATEX*
Ingress protection	IP55

*Optional: Available on request


WIRING DIAGRAM

Black	C	230 Vac	SPEED 1
Brown	N		
Blue	P		
Black	C	230 Vac	SPEED 2
Blue	N		
Brown	P		
Black	C	230 Vac	SPEED 3
Blue	N		
Brown	P		

BLACK Control Wire
 BLUE Neutral
 BROWN Phase

PERFORMANCE

Absorbed Power (W)

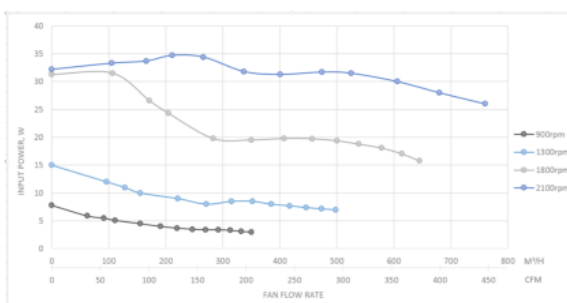

DIMENSION

