

## Auto-evaporation condensation water

A small turbine placed near the battery, directs the the condensate water to the battery itself, which turns it into steam.

This mechanism no longer requires the use of a tray or connection to a condensate drain.

### DESIGN

- Compact design
- LED Display
- Ergonomic controls

### SMART

- Auto-swing function for quick comfort
- Self-diagnosis
- Timer 24H

### COMFORT

- Condensate drain on the bottom with 1m tube
- Built-in remote control port

### PERFORMANCE


- How it works in: conditioning, dehumidification, ventilation
- Air flow 350 m<sup>3</sup>/hr

# Portable

# Haier

2.5 kW

3.5 kW

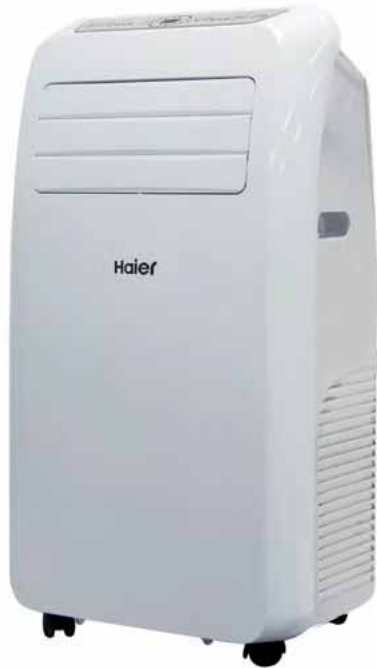

PORTABLE		Model	AM09AA1TAA	AM09AA1GAA	AM12AA1TAA	AM12AA1GAA
Performance data						
Power output	Cooling	Btu/h	9000	9000	12000	12000
		kW	2,6	2,6	3,5	3,5
Power output	Heating	Btu/h	-	9895	-	11260
		kW	-	2,9	-	3,3
Power Supply		Ph/V/Hz	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50
Power consumption	RAFF.	kW	1,05	1,05	1,37	1,37
Power consumption	RISC.	kW	-	1,0	-	1,35
Current consumption	RAFF.	A	4,8	4,8	5,9	5,9
Energy Class	EER		2,61 (A)	2,61 (A)	2,61 (A)	2,61 (A)
	COP		-	2,8		2,75 (A)
Dehumidification		L/h	0,9	0,9	1,2	1,2
Treated air volume		m <sup>3</sup> /h	350	350	350	350
Noise level	H / M / L	dB(A)	56/54/52	56/54/52	56/54/52	56/54/52
Dimensions (WxDxH)	WxDxH	mm	443x340x815	443x340x815	443x340x815	443x340x815
Weight		kg	25	25	28	28
Refrigerant			R290	R290	R290	R290
Carica refrigerante in fabbrica		kg	0,235	0,235	0,245	0,245
Equivalent tonnes of CO <sup>2</sup>		tCO <sub>2</sub> EQ	0,70	0,70	0,73	0,73