


MODEL

EMT6144Z
embraco
Nidec
**APPROVALS**


ENGINEERING CODE
 194PA67


APPROVED REFRIGERANT
 R-134a


POWER SUPPLY
 220-240 V 50 Hz


STANDARD CONDITIONS
 EN12900


APPLICATION
 HBP


COOLING CAPACITY
 505 W (HBP)


EFFICIENCY
 2.43 W/W (HBP)


MOTOR TYPE
 CSIR


STARTING TORQUE
 HST
DATA**General Data**

Type	Hermetic reciprocating
Technology Type	On-Off
Displacement	5.19 cm ³
Compressor Cooling	Fan/NotControlled/220
Expansion Device	Capillary Tube or Expansion Valve
Horse Power	1/5 hp
Power Supply	220-240 V 50 Hz
Evaporating Temperature Range	-15 °C to 10 °C

Electrical Data

Motor type	CSIR
Starting Torque	HST
Start Winding Resistance	21.3 Ω at 25° C
Run Winding Resistance	12.95 Ω at 25° C
Rated Load Amperage (RLA) at 50 Hz	1.35 A

Mechanical Data

Oil Charge	180 ml
Oil Type Configuration	ESTER
Oil Type Viscosity	ISO22
Weight	7.72 Kg

Electrical Components

	Description
Start Capacitor	43-53 Uf / 330 V
Starting Device	Relay MTRP-34*
Motor Protection	T0827/G6

External Characteristics

Tray Holder	Yes	
Connector	Internal Diameter	Shape
Suction	6.1 mm	Slanted 42° up + 45° to Back/Copper
Discharge	4.94 mm	Slanted parallel BP+24° to Back/Copper
Process	6.1 mm	Slanted 45° up + 45° to Back/Copper

PERFORMANCE

Rated Points

Condensing Temperature	Evaporating Temperature	Cooling Capacity	Power Consumption	Gas Flow Rate	Efficiency
50.00°C	5.00°C	505 W	207 W	12.71 kg/h	2.43 W/W

Test Condition: EN12900HBP, Fan/NotControlled/220, Return Gas 20°C, Evaporation 5.00°C, Condensing 50.00°C, Ambient 35°C, Liquid 50°C, Subcooling OK. Data are an indication of performance based simulation.

Performance Curve Data

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Power W	Gas Flow Rate kg/h	Efficiency W/W
-15	267	131	5.64	2.03
-10	336	142	7.14	2.36
-5	417	154	8.91	2.71
0	511	165	10.99	3.1
5	620	175	13.43	3.54
10	744	185	16.27	4.02

Test Condition: EN12900HBP, Fan/NotControlled/220, Return Gas 20°C, Ambient 35°C , Subcooling OK. Data are an indication of performance based simulation.

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Power W	Gas Flow Rate kg/h	Efficiency W/W
-15	230	139	5.33	1.66
-10	291	152	6.79	1.91
-5	363	167	8.52	2.18
0	448	181	10.58	2.48
5	545	195	12.99	2.79
10	657	209	15.81	3.14


Test Condition: EN12900HBP, Fan/NotControlled/220, Return Gas 20°C, Ambient 35°C , Subcooling OK. Data are an indication of performance based simulation.

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Power W	Gas Flow Rate kg/h	Efficiency W/W
-15	194	148	5.00	1.31
-10	247	164	6.41	1.51
-5	310	180	8.10	1.73
0	385	197	10.11	1.96
5	470	213	12.49	2.2
10	569	230	15.27	2.47

Test Condition: EN12900HBP, Fan/NotControlled/220, Return Gas 20°C, Ambient 35°C , Subcooling OK. Data are an indication of performance based simulation.

Operating Envelope

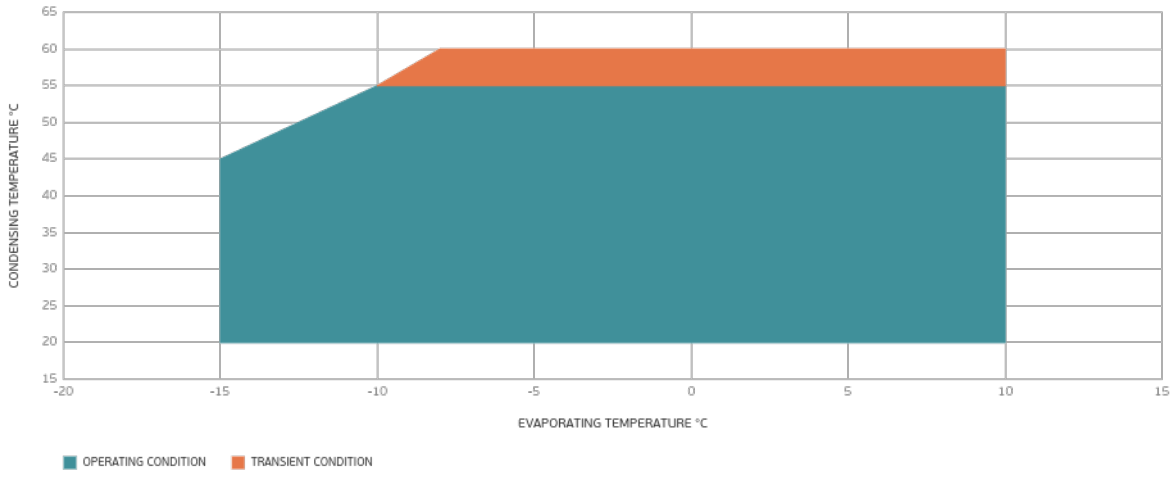

External Dimensions

