



Tecumseh


# WINTSYS®

Solution for outdoor conditions. Ready-to-install and value for money. Medium and low temperature applications.

- ▶ High efficiency
- ▶ Easy to install
- ▶ Reliability

## FEATURES

- ▶ Tecumseh's reciprocating compressor, industry proven for reliability
- ▶ Required electrical components supplied pre-installed
- ▶ Rugged design, handles ambient temperatures up to 46°C
- ▶ Fan condenser coil optimization
- ▶ Stylish housing design
- ▶ Base / floor mounting

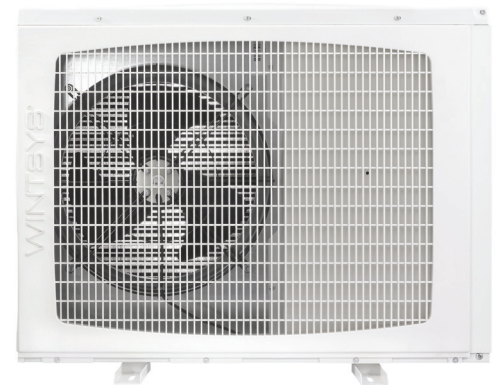


## APPLICATIONS

Walk-in cold rooms and refrigerated display cases, ice machines, fermentation chambers and floral cases.



## AUTHORISED REFRIGERANTS

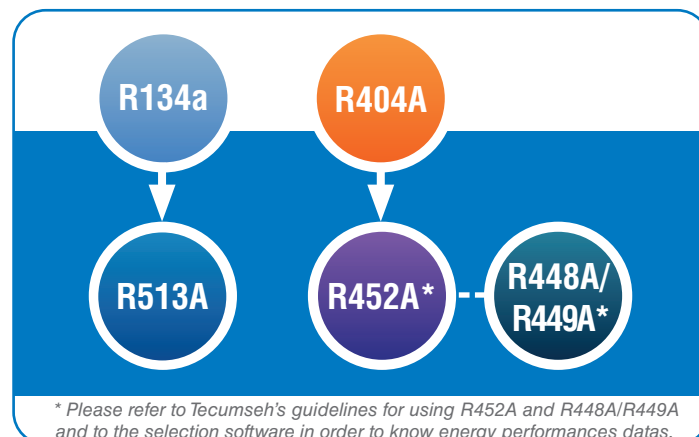



# WINTSYS®

Solution for outdoor conditions. Ready-to-install and value for money. Medium and low temperature applications.

## + MBP R452A

SIZE	DESIGNATION	VOLTAGE	COOLING CAP. (KW)
S	WINAE4450Z	FZ	0,81
	WINAE4460Z	FZ	0,97
	WINAE4470Z	FZ	1,12
	WINAJ9480Z	FZ, TZ	1,30
	WINAJ9510Z	FZ, TZ	1,58
	WINAJ9513Z	FZ, TZ	1,98
	WINAJ4517Z	FZ, TZ	2,10
	WINAJ4519Z	FZ, TZ	2,60
M	WINFH4524Z	FZ, XG	2,87
	WINFH4531Z	FZ, XG	3,97
	WINAW4538Z	XC, XG	4,83
	WINFH4544Z	TX	5,24

## + MBP R134a

SIZE	DESIGNATION	VOLTAGE	COOLING CAP. (KW)
S	WINAE4450Y	FZ	0,73
	WINAE4460Y	FZ	0,82
	WINAJ4476Y	FZ	0,97
	WINAJ4492Y	FZ, TZ	1,23
	WINAJ4511Y	FZ, TZ	1,57
	WINAJ4513Y	FZ	1,69
	M	WINFH4518Y	FZ, TZ
WINFH4525Y		FZ, TZ	2,68

EN 13215 Ambient temperature 32°C, Superheating 10K, Sub cooling 3K, Evaporating temperature -10°C.

## - LBP R452A

SIZE	DESIGNATION	VOLTAGE	COOLING CAP. (KW)
S	WINAE2425Z	FZ	0,30
	WINAJ2440Z	FZ	0,43
	WINAJ2446Z	FZ, TZ	0,56
	WINAJ2464Z	FZ, TZ	0,78
M	WINFH2480Z	FZ, TZ	1,00
	WINFH2511Z	FZ, TZ	1,35

EN 13215 Ambient temperature 32°C, Superheating 10K, Sub cooling 3K, Evaporating temperature -35°C. R452A - Mid conditions.

## ELECTRICAL EQUIPMENT

- ▶ Pre-wired Electrical Box
- ▶ AC induction fan motor
- ▶ Crankcase Heater
- ▶ Isolator Switch
- ▶ Contactor
- ▶ High/low pressure with auto/manual reset switch
- ▶ DIN Rail length increased



NWDO148